

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 July 2001 (26.07.2001)

PCT

(10) International Publication Number  
WO 01/54225 A1

- (51) International Patent Classification<sup>7</sup>: H01Q 1/36
- (21) International Application Number: PCT/EP00/00411
- (22) International Filing Date: 19 January 2000 (19.01.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): FRAC-TUS, S.A. [ES/ES]; Gran Capitán, 2, despacho 303 Edifi-cio Nexus, E-08034 Barcelona (ES).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PUENTE BALIARDA, Carles [ES/ES]; Once Septiembre 24, E-08391 Tiana (ES). ROZAN, Edouard, Jean, Louis [FR/ES]; Loreto, 13 B - entlo 3, E-08029 Barcelona (ES). ANGUERA PROS, Jaime [ES/ES]; Pasaje Blasco Ibañez 15 - 2º 2, E-12500 Vinaros (ES).
- (74) Agent: CARPINTERO LOPEZ, Francisco; Herrero & Asociados, S.L., Alcalá, 21, E-28014 Madrid (ES).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the begin-ning of each regular issue of the PCT Gazette.



WO 01/54225 A1

(54) Title: SPACE-FILLING MINIATURE ANTENNAS

(57) Abstract: A novel geometry, the geometry of Space-Filling Curves (SFC) is defined in the present invention and it is used to shape a part of an antenna. By means of this novel technique, the size of the antenna can be reduced with respect to prior art, or alternatively, given a fixed size the antenna can operate at a lower frequency with respect to a conventional antenna of the same size.

- 1 -

SPACE-FILLING MINIATURE ANTENNAS

## DESCRIPTION

5

Object of the Invention

The present invention generally refers to a new family of antennas of reduced size based on an innovative geometry, the geometry of the curves named as Space-Filling Curves (SFC). An antenna is said to be a small antenna (a miniature antenna) when it can be fitted in a small space compared to the operating wavelength. More precisely, the radiansphere is taken as the reference for classifying an antenna as being small. The radiansphere is an imaginary sphere of radius equal to the operating wavelength divided by two times  $\pi$ ; an antenna is said to be small in terms of the wavelength when it can be fitted inside said radiansphere.

20 A novel geometry, the geometry of Space-Filling Curves (SFC) is defined in the present invention and it is used to shape a part of an antenna. By means of this novel technique, the size of the antenna can be reduced with respect to prior art, or alternatively, given a fixed size  
25 the antenna can operate at a lower frequency with respect to a conventional antenna of the same size.

The invention is applicable to the field of the telecommunications and more concretely to the design of  
30 antennas with reduced size.

- 2 -

Background and Summary of the Invention

The fundamental limits on small antennas where theoretically established by H.Wheeler and L.J.Chu in the middle 1940's. They basically stated that a small antenna  
5 has a high quality factor (Q) because of the large reactive energy stored in the antenna vicinity compared to the radiated power. Such a high quality factor yields a narrow bandwidth; in fact, the fundamental derived in such theory imposes a maximum bandwidth given a specific size  
10 of an small antenna.

Related to this phenomenon, it is also known that a small antenna features a large input reactance (either capacitive or inductive) that usually has to be  
15 compensated with an external matching/loading circuit or structure. It also means that is difficult to pack a resonant antenna into a space which is small in terms of the wavelength at resonance. Other characteristics of a small antenna are its small radiating resistance and its  
20 low efficiency.

Searching for structures that can efficiently radiate from a small space has an enormous commercial interest, especially in the environment of mobile communication  
25 devices (cellular telephony, cellular pagers, portable computers and data handlers, to name a few examples), where the size and weight of the portable equipments need to be small. According to R.C.Hansen (R.C.Hansen, "Fundamental Limitations on Antennas," Proc.IEEE, vol.69,  
30 no.2, February 1981), the performance of a small antenna depends on its ability to efficiently use the small

- 3 -

available space inside the imaginary radiansphere surrounding the antenna.

In the present invention, a novel set of geometries  
5 named Space-Filling Curves (hereafter SFC) are introduced  
for the design and construction of small antennas that  
improve the performance of other classical antennas  
described in the prior art (such as linear monopoles,  
dipoles and circular or rectangular loops).

10

Some of the geometries described in the present  
invention are inspired in the geometries studied already  
in the XIX century by several mathematicians such as  
Giuseppe Peano and David Hilbert. In all said cases the  
15 curves were studied from the mathematical point of view  
but were never used for any practical engineering  
application.

The dimension (D) is often used to characterize  
20 highly complex geometrical curves and structures such  
those described in the present invention. There exists  
many different mathematical definitions of dimension but  
in the present document the box-counting dimension (which  
is well-known to those skilled in mathematics theory) is  
25 used to characterize a family of designs. Those skilled in  
mathematics theory will notice that optionally, an  
Iterated Function System (IFS), a Multireduction Copy  
Machine (MRCM) or a Networked Multireduction Copy Machine  
(MRCM) algorithm can be used to construct some space-  
30 filling curves as those described in the present  
invention.

- 4 -

The key point of the present invention is shaping part of the antenna (for example at least a part of the arms of a dipole, at least a part of the arm of a monopole, the perimeter of the patch of a patch antenna, the slot in a slot antenna, the loop perimeter in a loop antenna, the horn cross-section in a horn antenna, or the reflector perimeter in a reflector antenna) as a space-filling curve, that is, a curve that is large in terms of physical length but small in terms of the area in which the curve can be included. More precisely, the following definition is taken in this document for a space-filling curve: a curve composed by at least ten segments which are connected in such a way that each segment forms an angle with their neighbours, that is, no pair of adjacent segments define a larger straight segment, and wherein the curve can be optionally periodic along a fixed straight direction of space if and only if the period is defined by a non-periodic curve composed by at least ten connected segments and no pair of said adjacent and connected segments define a straight longer segment. Also, whatever the design of such SFC is, it can never intersect with itself at any point except the initial and final point (that is, the whole curve can be arranged as a closed curve or loop, but none of the parts of the curve can become a closed loop). A space-filling curve can be fitted over a flat or curved surface, and due to the angles between segments, the physical length of the curve is always larger than that of any straight line that can be fitted in the same area (surface) as said space-filling curve. Additionally, to properly shape the structure of a miniature antenna according to the present invention, the

- 5 -

segments of the SFC curves must be shorter than a tenth of the free-space operating wavelength.

Depending on the shaping procedure and curve  
5 geometry, some infinite length SFC can be theoretically  
designed to feature a Hausdorff dimension larger than  
their topological-dimension. That is, in terms of the  
classical Euclidean geometry, It is usually understood  
that a curve is always a one-dimension object; however  
10 when the curve is highly convoluted and its physical  
length is very large, the curve tends to fill parts of the  
surface which supports it; in that case the Hausdorff  
dimension can be computed over the curve (or at least an  
approximation of it by means of the box-counting  
15 algorithm) resulting in a number larger than unity. Such  
theoretical infinite curves can not be physically  
constructed, but they can be approached with SFC designs.  
The curves 8 and 17 described in and Figure 2 and Figure 5  
are some examples of such SFC, that approach an ideal  
20 infinite curve featuring a dimension  $D = 2$ .

The advantage of using SFC curves in the physical  
shaping of the antenna is two-fold:

- 25 (a) Given a particular operating frequency or wavelength  
said SFC antenna can be reduced in size with respect  
to prior art.
- (b) Given the physical size of the SFC antenna, said SFC  
antenna can be operated at a lower frequency (a  
30 longer wavelength) than prior art.

- 6 -

Brief Description of the Drawings

Figure 1 shows some particular cases of SFC curves. From an initial curve (2), other curves (1), (3) and (4) with more than 10 connected segments are formed. This particular family of curves are named hereafter SZ curves.

Figure 2 shows a comparison between two prior art meandering lines and two SFC periodic curves, constructed from the SZ curve of drawing 1.

Figure 3 shows a particular configuration of an SFC antenna. It consists on tree different configurations of a dipole wherein each of the two arms is fully shaped as an SFC curve (1).

Figure 4 shows other particular cases of SFC antennas. They consist on monopole antennas.

Figure 5 shows an example of an SFC slot antenna where the slot is shaped as the SFC in drawing 1.

Figure 6 shows another set of SFC curves (15-20) inspired on the Hilbert curve and hereafter named as Hilbert curves. A standard, non-SFC curve is shown in (14) for comparison.

Figure 7 shows another example of an SFC slot antenna based on the SFC curve (17) in drawing 6.

- 7 -

Figure 8 shows another set of SFC curves (24, 25, 26, 27) hereafter known as ZZ curves. A conventional squared zigzag curve (23) is shown for comparison.

5        Figure 9 shows a loop antenna based on curve (25) in a wire configuration (top). Below, the loop antenna 29 is printed over a dielectric substrate (10).

10       Figure 10 shows a slot loop antenna based on the SFC (25) in drawing 8.

Figure 11 shows a patch antenna wherein the patch perimeter is shaped according to SFC (25).

15       Figure 12 shows an aperture antenna wherein the aperture (33) is practiced on a conducting or superconducting structure (31), said aperture being shaped with SFC (25).

20       Figure 13 shows a patch antenna with an aperture on the patch based on SFC (25).

25       Figure 14 shows another particular example of a family of SFC curves (41, 42, 43) based on the Giuseppe Peano curve. A non-SFC curve formed with only 9 segments is shown for comparison.

Figure 15 shows a patch antenna with an SFC slot based on SFC (41).

30



- 8 -

Figure 16 shows a wave-guide slot antenna wherein a rectangular waveguide (47) has one of its walls slotted with SFC curve (41).

5        Figure 17 shows a horn antenna, wherein the aperture and cross-section of the horn is shaped after SFC (25).

10        Figure 18 shows a reflector of a reflector antenna wherein the perimeter of said reflector is shaped as SFC (25).

15        Figure 19 shows a family of SFC curves (51, 52, 53) based on the Giuseppe Peano curve. A non-SFC curve formed with only nine segments is shown for comparison (50).

      Figure 20 shows another family of SFC curves (55, 56, 57, 58). A non-SFC curve (54) constructed with only five segments is shown for comparison.

20        Figure 21 shows two examples of SFC loops (59, 60) constructed with SFC (57).

25        Figure 22 shows a family of SFC curves (61, 62, 63, 64) named here as HilbertZZ curves.

      Figure 23 shows a family of SFC curves (66, 67, 68) named here as Peanodec curves. A non-SFC curve (65) constructed with only nine segments is shown for comparison.

30

- 9 -

Figure 24 shows a family of SFC curves (70, 71, 72) named here as Peanoinc curves. A non-SFC curve (69) constructed with only nine segments is shown for comparison.

5

Figure 25 shows a family of SFC curves (73, 74, 75) named here as PeanoZZ curves. A non-SFC curve (23) constructed with only nine segments is shown for comparison.

10

#### Detailed Description of the Preferred Embodiments

Figure 1 and Figure 2 show some examples of SFC curves. Drawings (1), (3) and (4) in Figure 1 show three examples of SFC curves named SZ curves. A curve that is not an SFC since it is only composed of 6 segments is shown in drawing (2) for comparison. The drawings (7) and (8) in Figure 2 show another two particular examples of SFC curves, formed from the periodic repetition of a motive including the SFC curve (1). It is important noticing the substantial difference between these examples of SFC curves and some examples of periodic, meandering and not SFC curves such as those in drawings (5) and (6) in Figure 2. Although curves (5) and (6) are composed by more than 10 segments, they can be substantially considered periodic along a straight direction (horizontal direction) and the motive that defines a period or repetition cell is constructed with less than 10 segments (the period in drawing (5) includes only four segments, while the period of the curve (6) comprises nine segments) which contradicts the definition of SFC curve introduced in the present invention. SFC curves are substantially

20  
25  
30

- 10 -

more complex and pack a longer length in a smaller space; this fact in conjunction with the fact that each segment composing an SFC curve is electrically short (shorter than a tenth of the free-space operating wavelength as claimed in this invention) play a key role in reducing the antenna size. Also, the class of folding mechanisms used to obtain the particular SFC curves described in the present invention are important in the design of miniature antennas.

10

Figure 3 describes a preferred embodiment of an SFC antenna. The three drawings display different configurations of the same basic dipole. A two-arm antenna dipole is constructed comprising two conducting or superconducting parts, each part shaped as an SFC curve. For the sake of clarity but without loss of generality, a particular case of SFC curve (the SZ curve (1) of Figure 1) has been chosen here; other SFC curves as for instance, those described in Figs. 1, 2, 6, 8, 14, 19, 20, 21, 22, 23, 24 or 25 could be used instead. The two closest tips of the two arms form the input terminals (9) of the dipole. The terminals (9) have been drawn as conducting or superconducting circles, but as it is clear to those skilled in the art, such terminals could be shaped following any other pattern as long as they are kept small in terms of the operating wavelength. Also, the arms of the dipoles can be rotated and folded in different ways to finely modify the input impedance or the radiation properties of the antenna such as, for instance, polarization. Another preferred embodiment of an SFC dipole is also shown in Figure 3, where the conducting or

25  
30

- 11 -

superconducting SFC arms are printed over a dielectric substrate (10); this method is particularly convenient in terms of cost and mechanical robustness when the SFC curve is long. Any of the well-known printed circuit fabrication techniques can be applied to pattern the SFC curve over the dielectric substrate. Said dielectric substrate can be for instance a glass-fibre board, a teflon based substrate (such as Cuclad®) or other standard radiofrequency and microwave substrates (as for instance Rogers 4003® or Kapton®). The dielectric substrate can even be a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an air-plane, to transmit or receive radio, TV, cellular telephone (GSM 900, GSM 1800, UMTS) or other communication services electromagnetic waves. Of course, a balun network can be connected or integrated at the input terminals of the dipole to balance the current distribution among the two dipole arms.

Another preferred embodiment of an SFC antenna is a monopole configuration as shown in Figure 4. In this case one of the dipole arms is substituted by a conducting or superconducting counterpoise or ground plane (12). A handheld telephone case, or even a part of the metallic structure of a car, train or can act as such a ground counterpoise. The ground and the monopole arm (here the arm is represented with SFC curve (1), but any other SFC curve could be taken instead) are excited as usual in prior art monopoles by means of, for instance, a transmission line (11). Said transmission line is formed by two conductors, one of the conductors is connected to

- 12 -

the ground counterpoise while the other is connected to a point of the SFC conducting or superconducting structure. In the drawings of Figure 4, a coaxial cable (11) has been taken as a particular case of transmission line, but it is clear to any skilled in the art that other transmission lines (such as for instance a microstrip arm) could be used to excite the monopole. Optionally, and following the scheme described in Figure 3, the SFC curve can be printed over a dielectric substrate (10).

10

Another preferred embodiment of an SFC antenna is a slot antenna as shown, for instance in Figures 5, 7 and 10. In Figure 5, two connected SFC curves (following the pattern (1) of Figure 1) form an slot or gap impressed over a conducting or superconducting sheet (13). Such sheet can be, for instance, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be part of the metallic structure of a handheld telephone, a car, train, boat or airplane. The exciting scheme can be any of the well known in conventional slot antennas and it does not become an essential part of the present invention. In all said three figures, a coaxial cable (11) has been used to excite the antenna, with one of the conductors connected to one side of the conducting sheet and the other one connected at the other side of the sheet across the slot. A microstrip transmission line could be used, for instance, instead of the coaxial cable.

15  
20  
25  
30

To illustrate that several modifications of the antenna that can be done based on the same principle and spirit of the present invention, a similar example is shown in Figure 7, where another curve (the curve (17) from the Hilbert family) is taken instead. Notice that neither in Figure 5, nor in Figure 7 the slot reaches the borders of the conducting sheet, but in another embodiment the slot can be also designed to reach the boundary of said sheet, breaking said sheet in two separate conducting sheets.

Figure 10 describes another possible embodiment of an slot SFC antenna. It is also an slot antenna in a closed loop configuration. The loop is constructed for instance by connecting four SFC gaps following the pattern of SFC (25) in Figure 8 (it is clear that other SFC curves could be used instead according to the spirit and scope of the present invention). The resulting closed loop determines the boundary of a conducting or superconducting island surrounded by a conducting or superconducting sheet. The slot can be excited by means of any of the well-known conventional techniques; for instance a coaxial cable (11) can be used, connecting one of the outside conductor to the conducting outer sheet and the inner conductor to the inside conducting island surrounded by the SFC gap. Again, such sheet can be, for example, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be part of the metallic structure of a handheld telephone, a car, train, boat or

- 14 -

air-plane. The slot can be even formed by the gap between two close but not co-planar conducting island and conducting sheet; this can be physically implemented for instance by mounting the inner conducting island over a surface of the optional dielectric substrate, and the surrounding conductor over the opposite surface of said substrate.

The slot configuration is not, of course, the only way of implementing an SFC loop antenna. A closed SFC curve made of a superconducting or conducting material can be used to implement a wire SFC loop antenna as shown in another preferred embodiment as that of Figure 9. In this case, a portion of the curve is broken such as the two resulting ends of the curve form the input terminals (9) of the loop. Optionally, the loop can be printed also over a dielectric substrate (10). In case a dielectric substrate is used, a dielectric antenna can be also constructed by etching a dielectric SFC pattern over said substrate, being the dielectric permittivity of said dielectric pattern higher than that of said substrate.

Another preferred embodiment is described in Figure 11. It consists on a patch antenna, with the conducting or superconducting patch (30) featuring an SFC perimeter (the particular case of SFC (25) has been used here but it is clear that other SFC curves could be used instead). The perimeter of the patch is the essential part of the invention here, being the rest of the antenna conformed, for example, as other conventional patch antennas: the patch antenna comprises a conducting or superconducting

- 15 -

ground-plane (31) or ground counterpoise, an the  
conducting or superconducting patch which is parallel to  
said ground-plane or ground-counterpoise. The spacing  
between the patch and the ground is typically below (but  
5 not restricted to) a quarter wavelength. Optionally, a  
low-loss dielectric substrate (10) (such as glass-fibre, a  
teflon substrate such as Cuclad® or other commercial  
materials such as Rogers® 4003) can be place between said  
patch and ground counterpoise. The antenna feeding scheme  
10 can be taken to be any of the well-known schemes used in  
prior art patch antennas, for instance: a coaxial cable  
with the outer conductor connected to the ground-plane and  
the inner conductor connected to the patch at the desired  
input resistance point (of course the typical  
15 modifications including a capacitive gap on the patch  
around the coaxial connecting point or a capacitive plate  
connected to the inner conductor of the coaxial placed at  
a distance parallel to the patch, and so on can be used as  
well); a microstrip transmission line sharing the same  
20 ground-plane as the antenna with the strip capacitively  
coupled to the patch and located at a distance below the  
patch, or in another embodiment with the strip placed  
below the ground-plane and coupled to the patch through an  
slot, and even a microstrip transmission line with the  
25 strip co-planar to the patch. All these mechanisms are  
well known from prior art and do not constitute an  
essential part of the present invention. The essential  
part of the present invention is the shape of the antenna  
(in this case the SFC perimeter of the patch) which  
30 contributes to reducing the antenna size with respect to  
prior art configurations.



- 16 -

Other preferred embodiments of SFC antennas based also on the patch configuration are disclosed in Figure 13 and Figure 15. They consist on a conventional patch antenna with a polygonal patch (30) (squared, triangular, pentagonal, hexagonal, rectangular, or even circular, to name just a few examples), with an SFC curve shaping a gap on the patch. Such an SFC line can form an slot or spur-line (44) over the patch (as seen in Figure 15) contributing this way in reducing the antenna size and introducing new resonant frequencies for a multiband operation, or in another preferred embodiment the SFC curve (such as (25) defines the perimeter of an aperture (33) on the patch (30) (Figure 13). Such an aperture contributes significantly to reduce the first resonant frequency of the patch with respect to the solid patch case, which significantly contributes to reducing the antenna size. Said two configurations, the SFC slot and the SFC aperture cases can of course be use also with SFC perimeter patch antennas as for instance the one (30) described in Figure 11.

At this point it becomes clear to those skilled in the art what is the scope and spirit of the present invention and that the same SFC geometric principle can be applied in an innovative way to all the well known, prior art configurations. More examples are given in Figures 12, 16, 17 and 18.

Figure 12 describes another preferred embodiment of an SFC antenna. It consists on an aperture antenna, said aperture being characterized by its SFC perimeter, said

- 17 -

aperture being impressed over a conducting ground-plane or ground-counterpoise (34), said ground-plane of ground-counterpoise consisting, for example, on a wall of a waveguide or cavity resonator or a part of the structure of a motor vehicle (such as a car, a lorry, an airplane or a tank). The aperture can be fed by any of the conventional techniques such as a coaxial cable (11), or a planar microstrip or strip-line transmission line, to name a few.

10

Figure 16 shows another preferred embodiment where the SFC curves (41) are slotted over a wall of a waveguide (47) of arbitrary cross-section. This way and slotted waveguide array can be formed, with the advantage of the size compressing properties of the SFC curves.

15

Figure 17 depicts another preferred embodiment, in this case a horn antenna (48) where the cross-section of the antenna is an SFC curve (25). In this case, the benefit comes not only from the size reduction property of SFC geometries, but also from the broadband behavior that can be achieved by shaping the horn cross-section. Primitive versions of these techniques have been already developed in the form of Ridge horn antennas. In said prior art cases, a single squared tooth introduced in at least two opposite walls of the horn is used to increase the bandwidth of the antenna. The richer scale structure of an SFC curve further contributes to a bandwidth enhancement with respect to prior art.

20  
25  
30

- 18 -

Figure 18 describes another typical configuration of antenna, a reflector antenna (49), with the newly disclosed approach of shaping the reflector perimeter with an SFC curve. The reflector can be either flat or curve, depending on the application or feeding scheme (in for instance a reflectarray configuration the SFC reflectors will preferably be flat, while in focus fed dish reflectors the surface bounded by the SFC curve will preferably be curved approaching a parabolic surface). Also, within the spirit of SFC reflecting surfaces, Frequency Selective Surfaces (FSS) can be also constructed by means of SFC curves; in this case the SFC are used to shape the repetitive pattern over the FSS. In said FSS configuration, the SFC elements are used in an advantageous way with respect to prior art because the reduced size of the SFC patterns allows a closer spacing between said elements. A similar advantage is obtained when the SFC elements are used in an antenna array in an antenna reflectarray.

20

Having illustrated and described the principles of our invention in several preferred embodiments thereof, it should be readily apparent to those skilled in the art that the invention can be modified in arrangement and detail without departing from such principles. We claim all modifications coming within the spirit and scope of the accompanying claims.

30

- 19 -

**CLAIMS**

1.- An antenna in which at least one of its parts is  
5 shaped as a space-filling curve (hereafter SFC), being  
said SFC defined as a curve composed by at least ten  
connected straight segments, wherein said segments are  
smaller than a tenth of the operating free-space wave  
length and they are spatially arranged in such a way that  
10 none of said adjacent and connected segments form another  
longer straight segment, wherein none of said segments  
intersect to each other except optionally at the tips of  
the curve, wherein the corners formed by each pair of said  
adjacent segments can be optionally rounded or smoothed  
15 otherwise, and wherein the curve can be optionally  
periodic along a fixed straight direction of space if and  
only if the period is defined by a non-periodic curve  
composed by at least ten connected segments and no pair of  
said adjacent and connected segments define a straight  
20 longer segment. Optionally the antenna includes a network  
between the radiating element and the input connector or  
transmission line, being said network either a matching  
network, an impedance transformer network, a balun  
network, a filter network, a diplexer network or a  
25 duplexer network.

2.- An antenna in which at least one of its parts is  
shaped as a space-filling curve (SFC), wherein said SFC  
features a box-counting dimension larger than one, being  
30 said box-counting dimension computed as usual as the slope  
of the straight portion of a log-log graph, wherein such a

- 20 -

straight portion is substantially defined as a straight segment over at least an octave of scales on the horizontal axes of the log-log graph. Optionally the antenna includes a network between the radiating element and the input connector, being said network either a matching network, an impedance transformer network, a balun network, a filter network, a diplexer network or a duplexer network.

3.- An antenna in which at least one of its parts is shaped either as a Hilbert or a Peano curve. Optionally the antenna includes a network between the radiating element and the input connector, being said network either a matching network, an impedance transformer network, a balun network, a filter network, a diplexer network or a duplexer network.

4.- An antenna in which at least one of its parts is shaped either as an SZ, ZZ, HilbertZZ, Peanoinc, Peanodec or PeanoZZ curve. Optionally the antenna includes a network between the radiating element and the input connector, being said network either a matching network, an impedance transformer network, a balun network, a filter network, a diplexer network or a duplexer network.

5.- A dipole antenna comprising two conducting or superconducting arms in which at least a part of at least one of the arms of the dipole is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

- 21 -

6.- A monopole antenna comprising a radiating arm and a ground counterpoise in which at least a part of said is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

7.- A slot antenna comprising at least a conducting or superconducting surface, wherein said surface includes a slot, wherein said slot is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4, wherein said slot can be filled or backed by a dielectric substrate and wherein said conducting or superconducting surface including said slot is either a wall of a waveguide, a wall of a cavity resonator, a conducting film over a glass or a window in a motor vehicle, or part of a metallic structure of the motor vehicle.

8.- A loop antenna comprising a conducting or superconducting wire wherein at least a portion of the wire forming the loop is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4, or alternatively comprising a conducting or superconducting surface with a slot or gap loop impressed on said conducting or superconducting surface, wherein part of the slot or gap loop is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4 or 7.

30

- 22 -

9.- A patch antenna comprising at least a conducting or superconducting ground-plane and a conducting or superconducting patch parallel to said ground-plane characterized by the perimeter of the patch which is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4 or characterized by an slot or aperture on the patch, being said slot or aperture perimeter shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

10.- An aperture antenna comprising at least a conducting or superconducting surface and an aperture on said surface wherein the aperture is characterized by its perimeter which is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4 and wherein said conducting or superconducting surface including said slot is either a wall of a waveguide, a wall of a cavity resonator, a transparent conducting film over a glass of a window in a motor vehicle, or part of a metallic structure of the motor vehicle, wherein said slot can be filled of backed by a dielectric substrate.

11.- A horn antenna characterized by the cross-section of the horn which is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

- 23 -

12.- A reflector antenna characterized by the perimeter of the reflector which is shaped either as an SFC, Hilbert, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

5

13.- A frequency selective surface (FSS) comprising a conducting or superconducting surface, wherein such surface is impressed with at least an slot, being said slot shaped either as an SFC, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4 or wherein said FSS comprises a dielectric surface in which a conducting or superconducting structure is printed over using any of the manufacturing techniques known in the previous art, said printed structures are characterized by its shape which is in part either an SFC, Peano, HilbertZZ, SZ, Peanoinc, Peanodec, PeanoZZ, or ZZ curve according to claim 1,2,3 or 4.

10

15

14.- A set of space-filling antennas according to previous claims wherein most of the antennas are fed with signal at a given frequency forming an array of SFC antennas, or where at least two of the antennas of said antenna set operate at different frequencies to give coverage to different communications services, wherein said antennas in any of the described configurations can be simultaneously fed by means of a distribution or diplexer network respectively.

20

25

15.- A space-filling antenna according to previous claims characterized by its size which is smaller than the

30



- 24 -

size of a triangular, rectangular, circular, pentagonal or hexagonal antenna in the same monopole, dipole, patch, slot, aperture, horn or reflector configuration operating at the same frequency.

5


16.- A method for determining and shaping a characteristic part of an antenna consisting on choosing a curve as the basic shape for said part, being said curve characterized by its constructing algorithms, said algorithms consisting on Iterated Function Systems (IFS),  
10 Multy Reduction Copy Machine (MRCM), Networked Multi Reduction Copy Machine (NMRCM) or a combination of said mathematical algorithms.

15

20

25


30

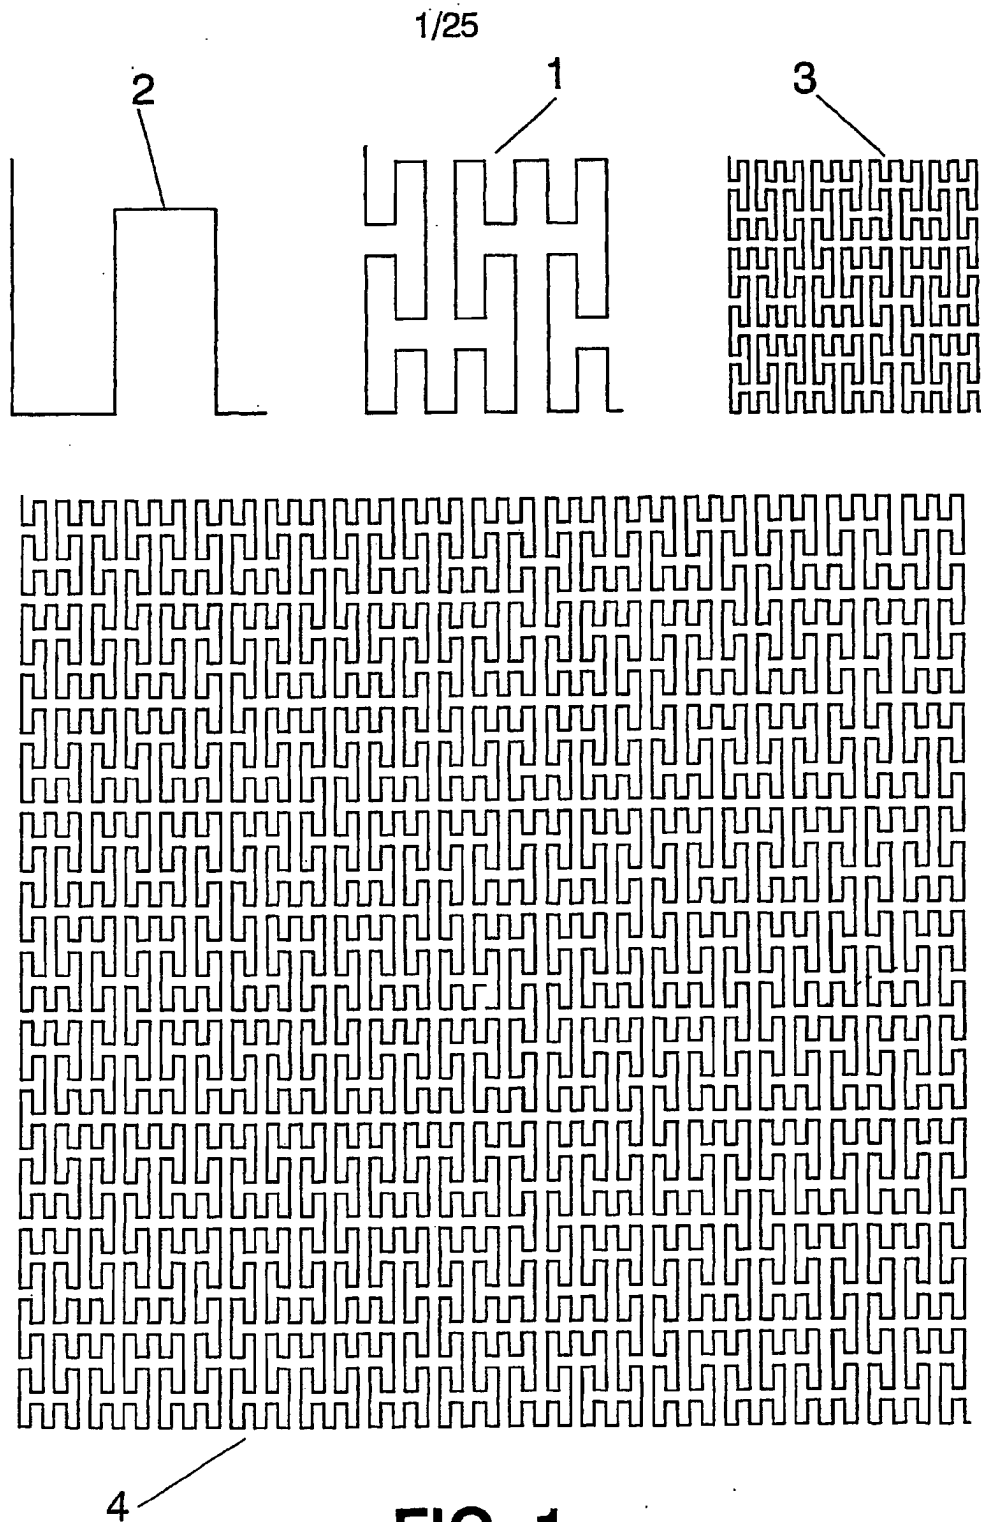

**FIG. 1**

SUBSTITUTE SHEET (RULE 26)


2/25

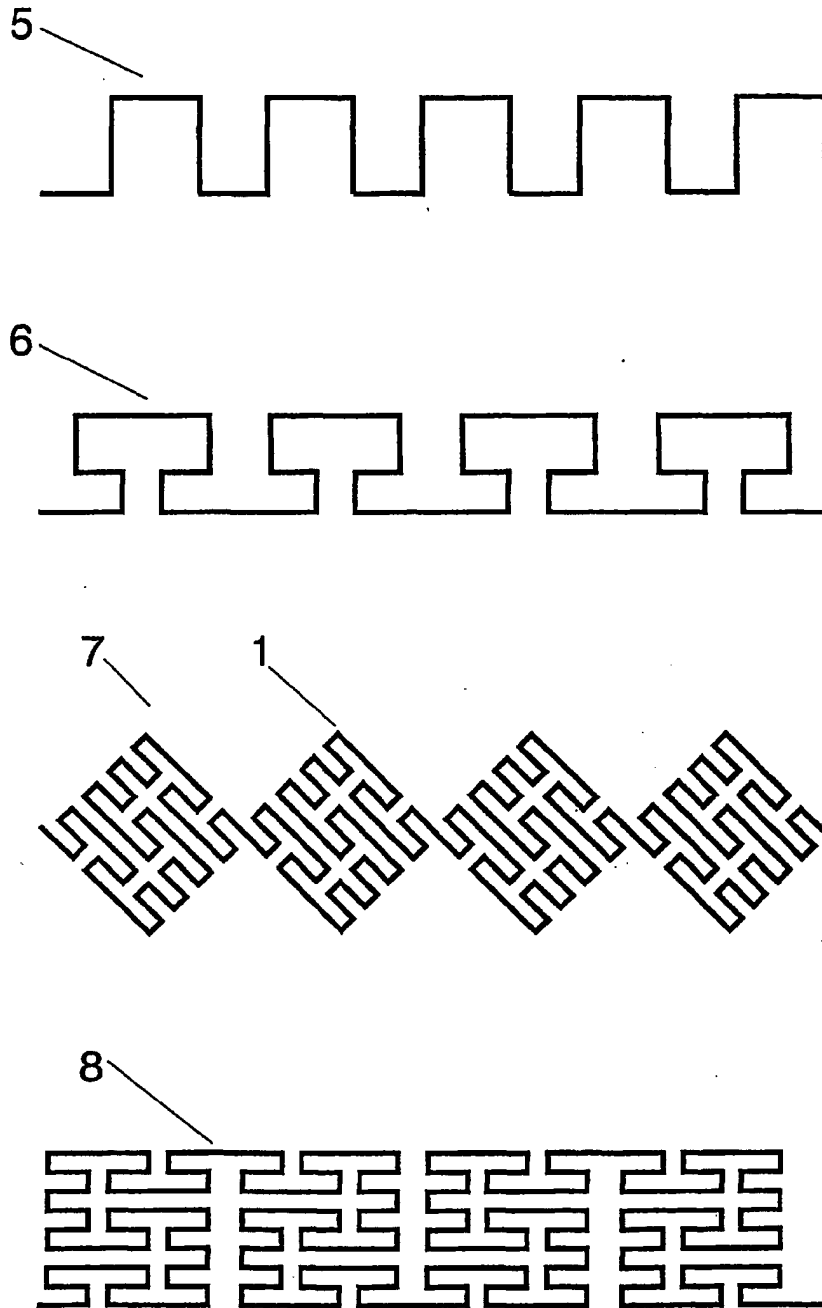

**FIG. 2**

SUBSTITUTE SHEET (RULE 26)


3/25

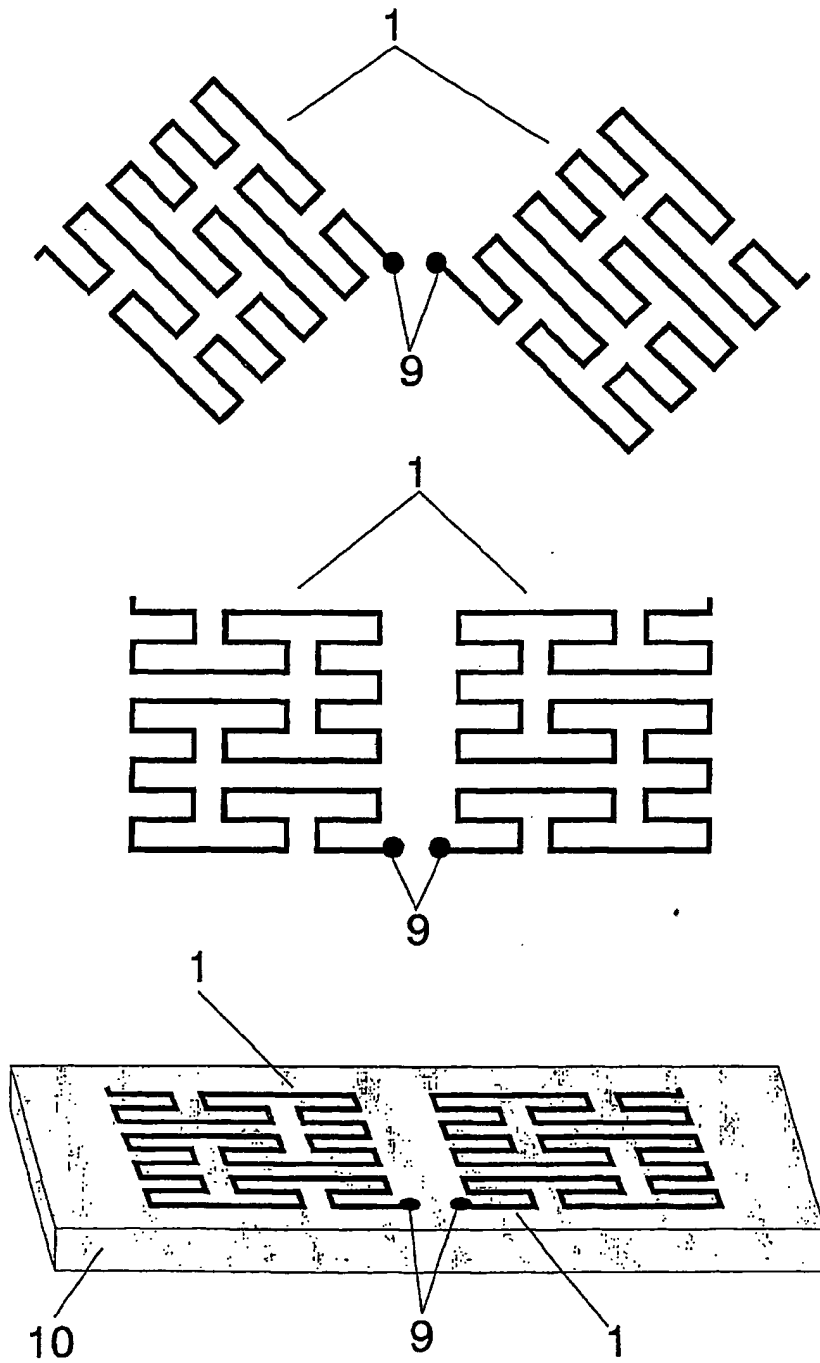

**FIG. 3**

SUBSTITUTE SHEET (RULE 26)


4/25

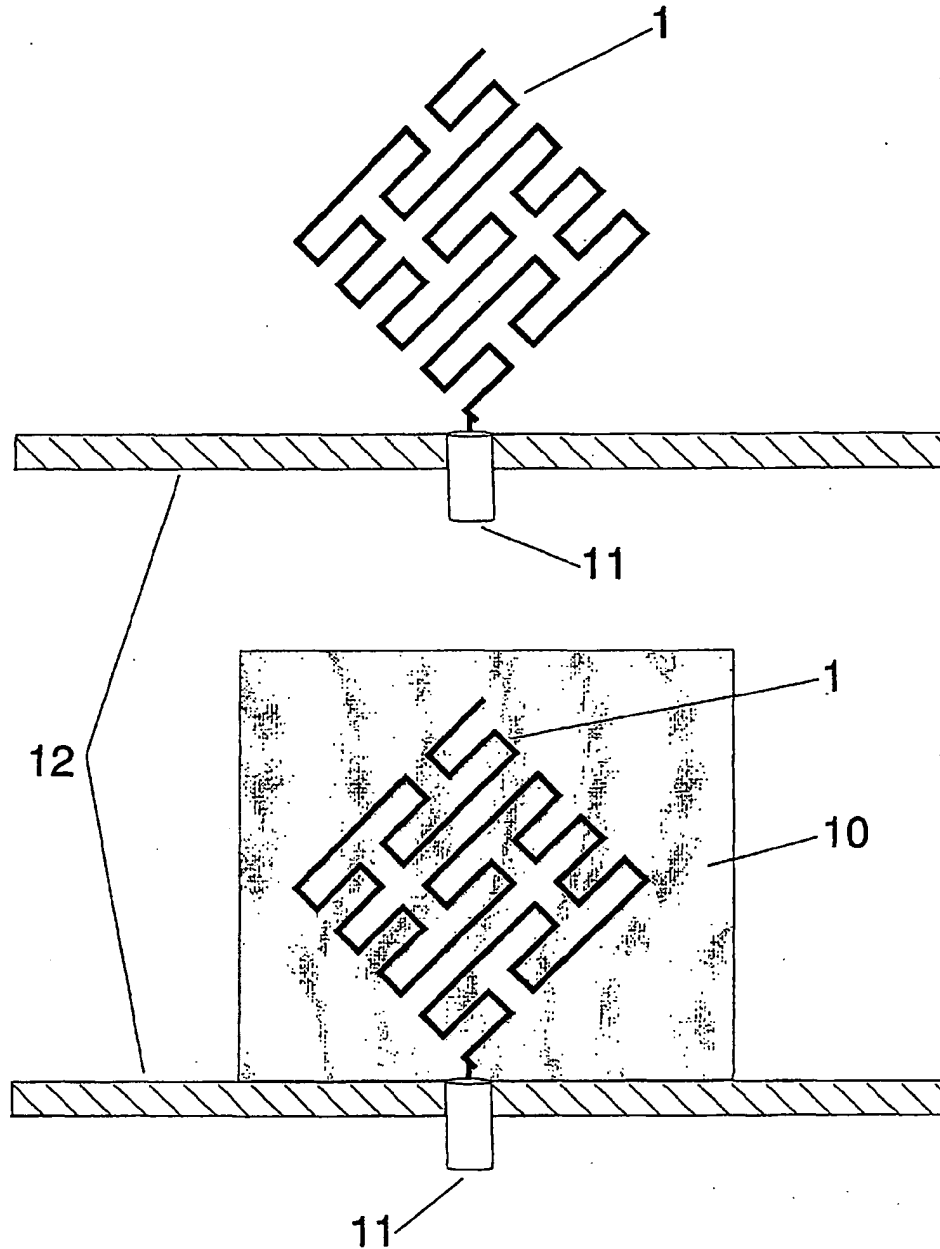

**FIG. 4**

SUBSTITUTE SHEET (RULE 26)




5/25

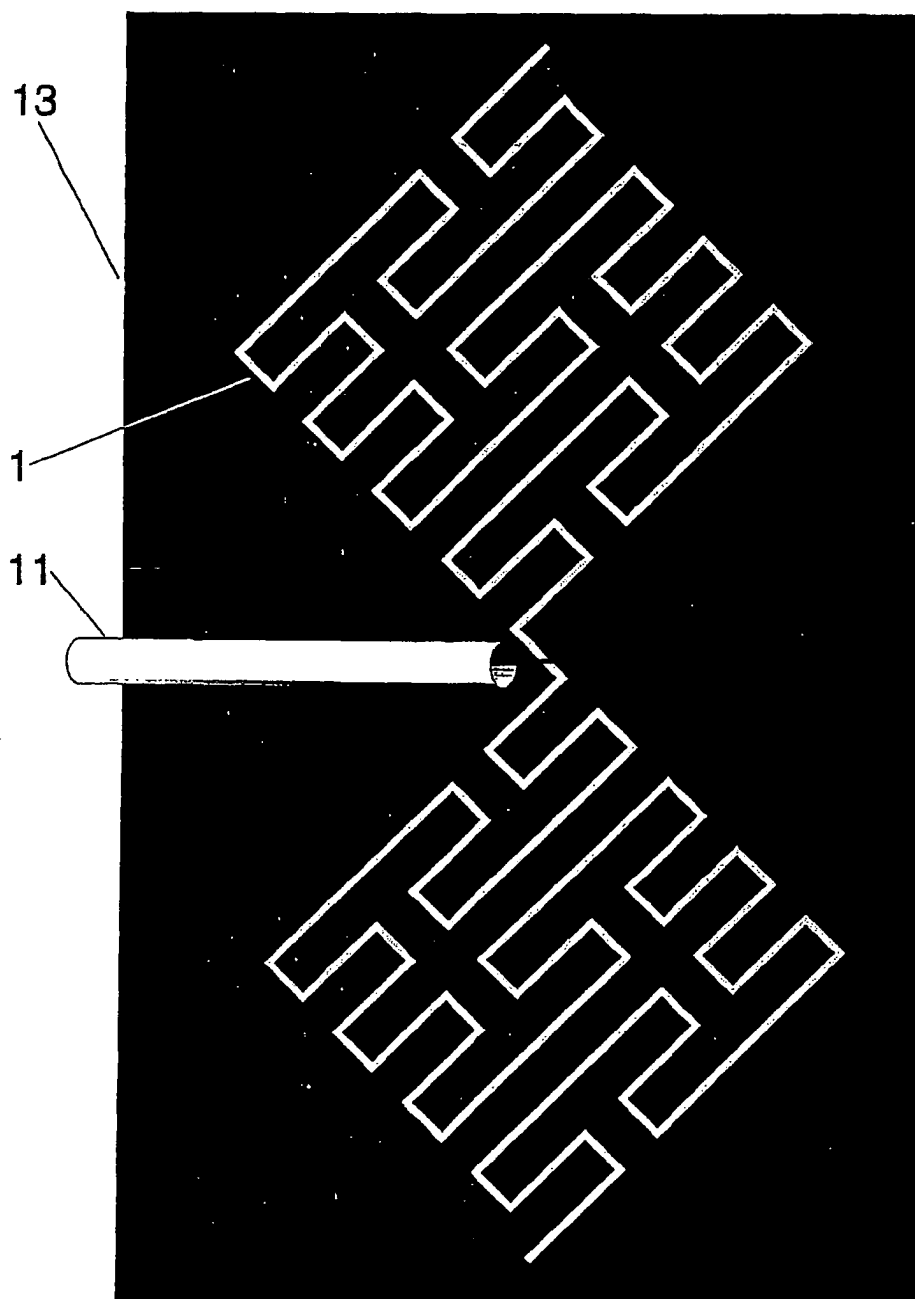

**FIG. 5**

SUBSTITUTE SHEET (RULE 26)

6/25

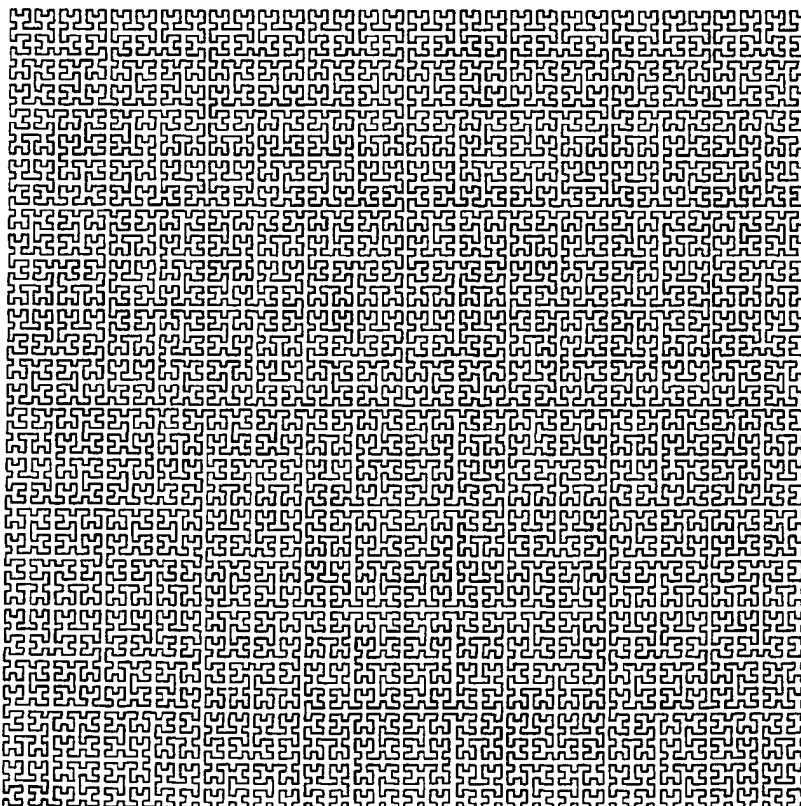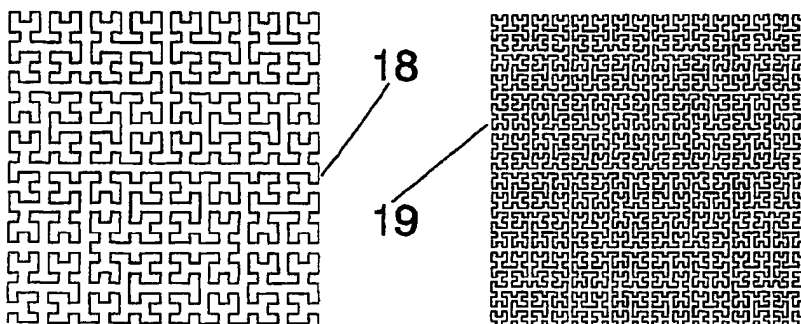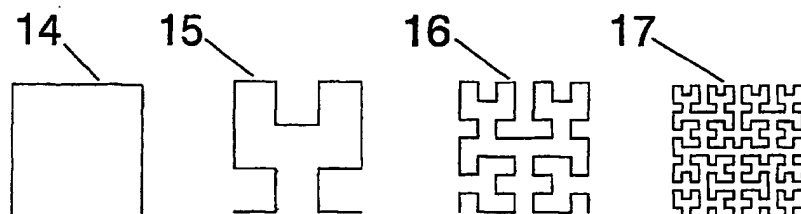


20

**FIG. 6**

SUBSTITUTE SHEET (RULE 26)

7/25

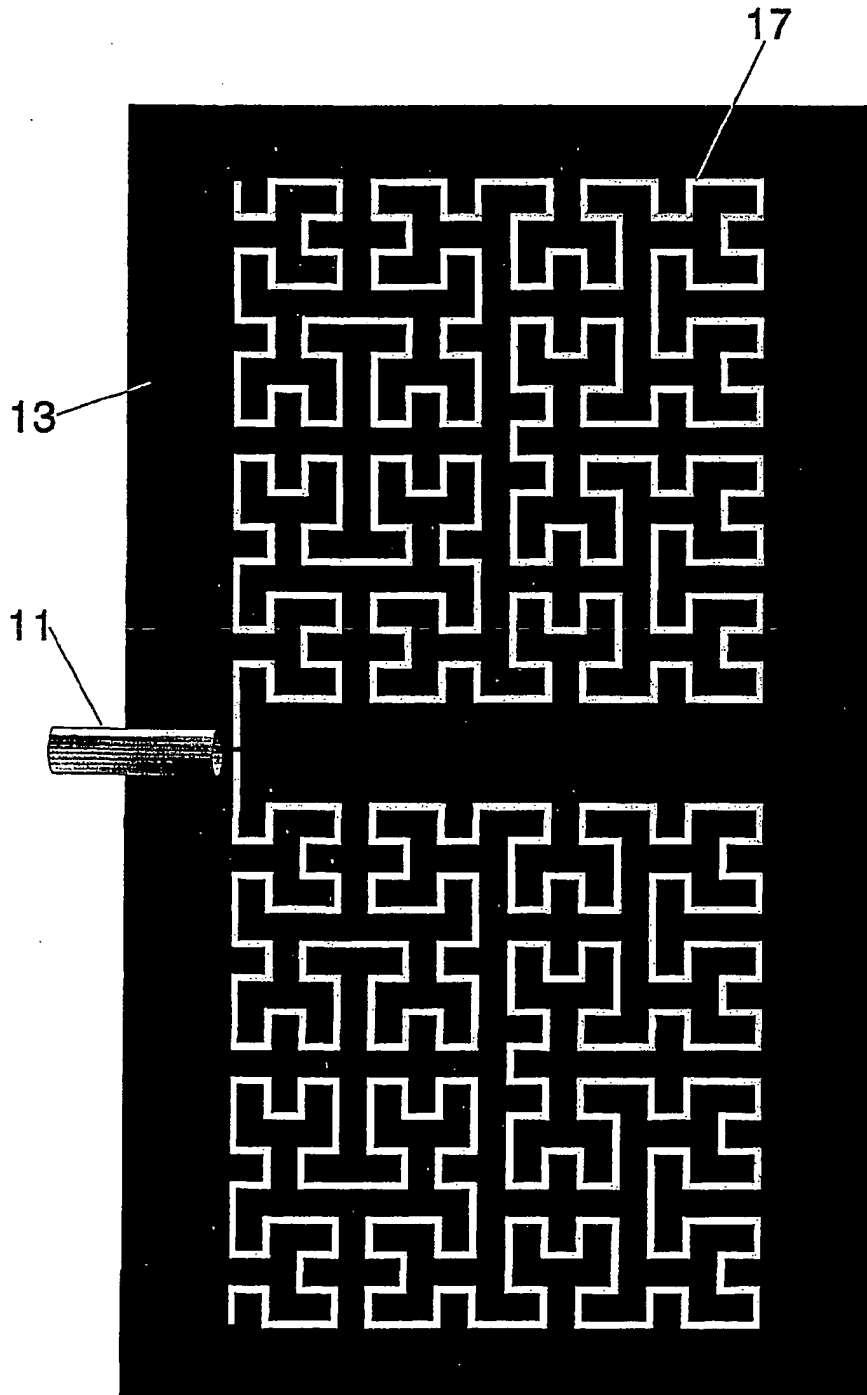


**FIG. 7**

SUBSTITUTE SHEET (RULE 26)




8/25

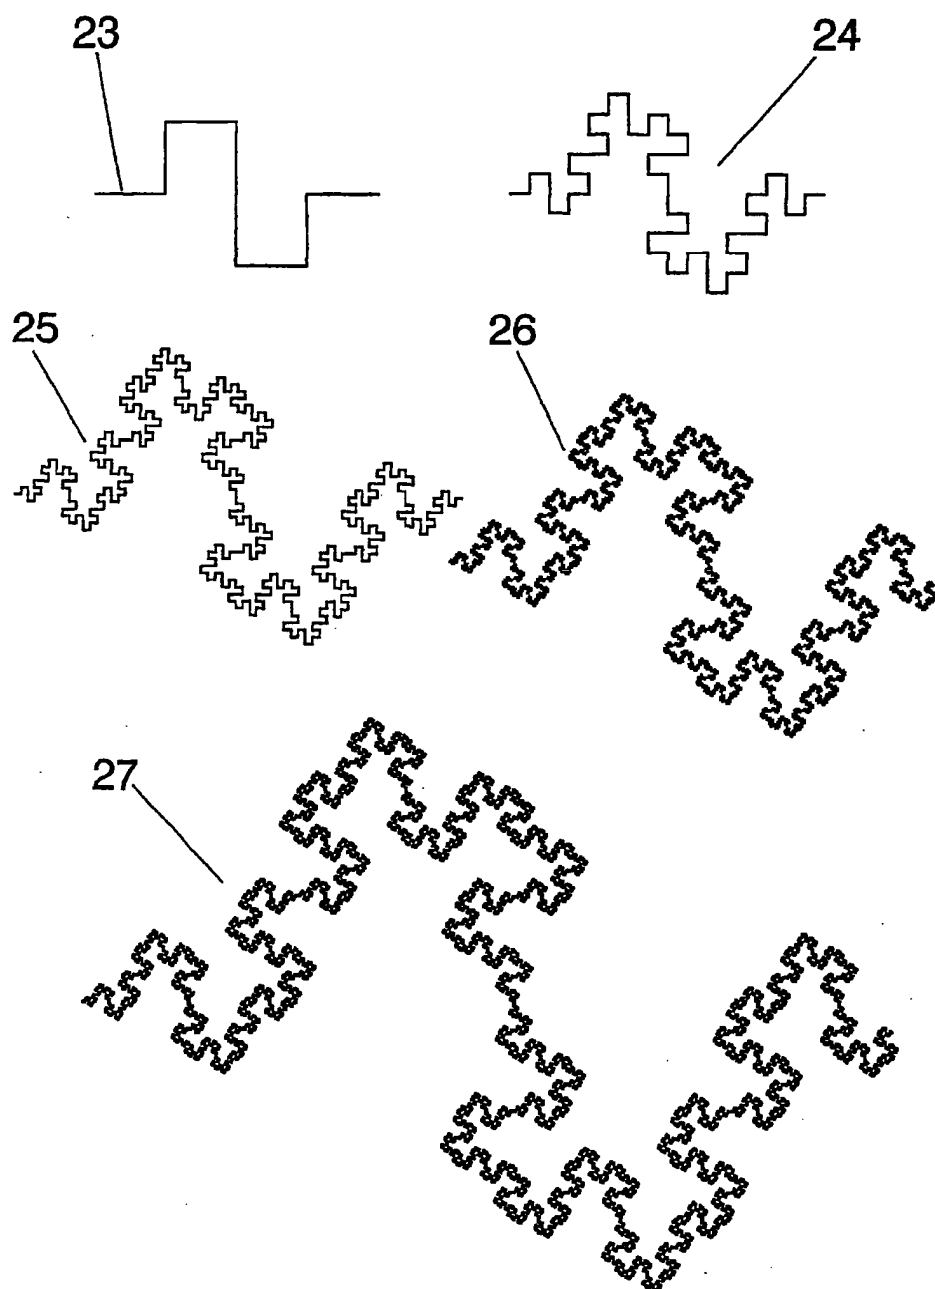

**FIG. 8**

SUBSTITUTE SHEET (RULE 26).


9/25

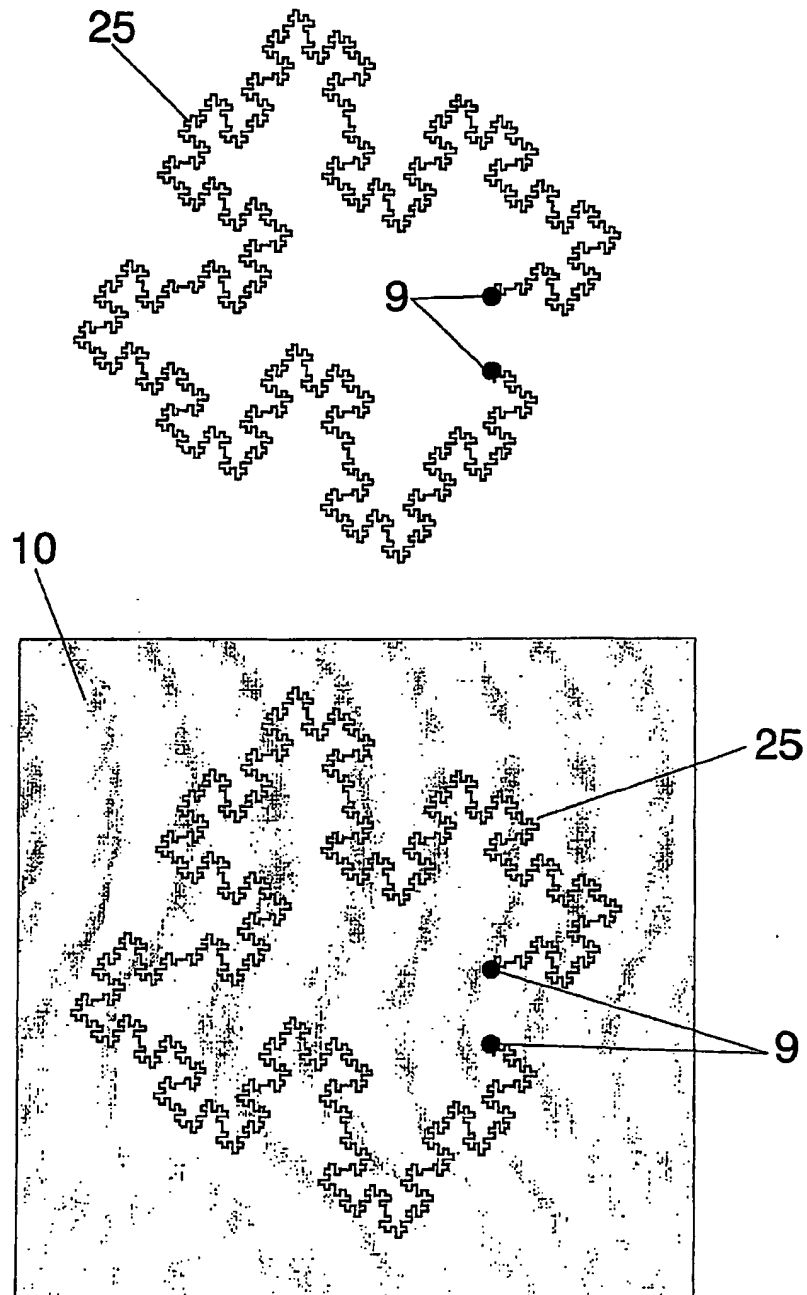

**FIG. 9**


SUBSTITUTE SHEET (RULE 26)

10/25

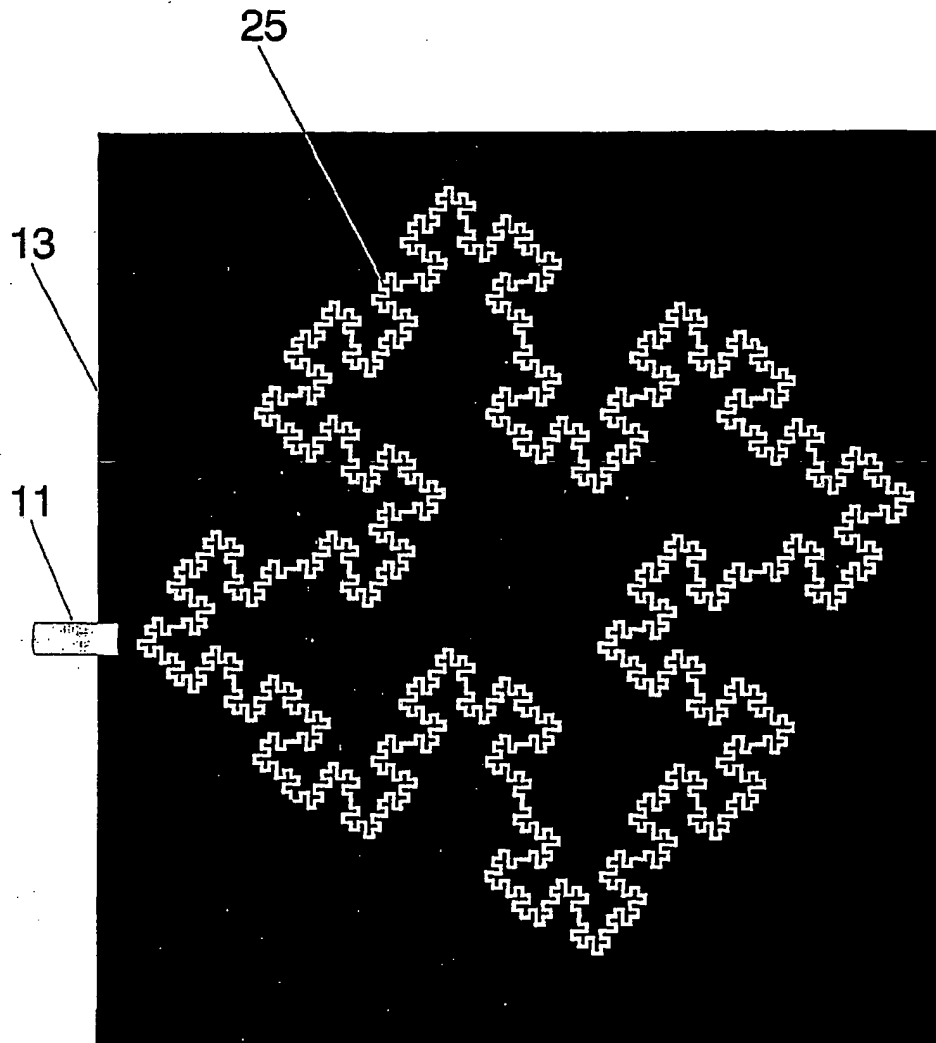


**FIG. 10**

11/25

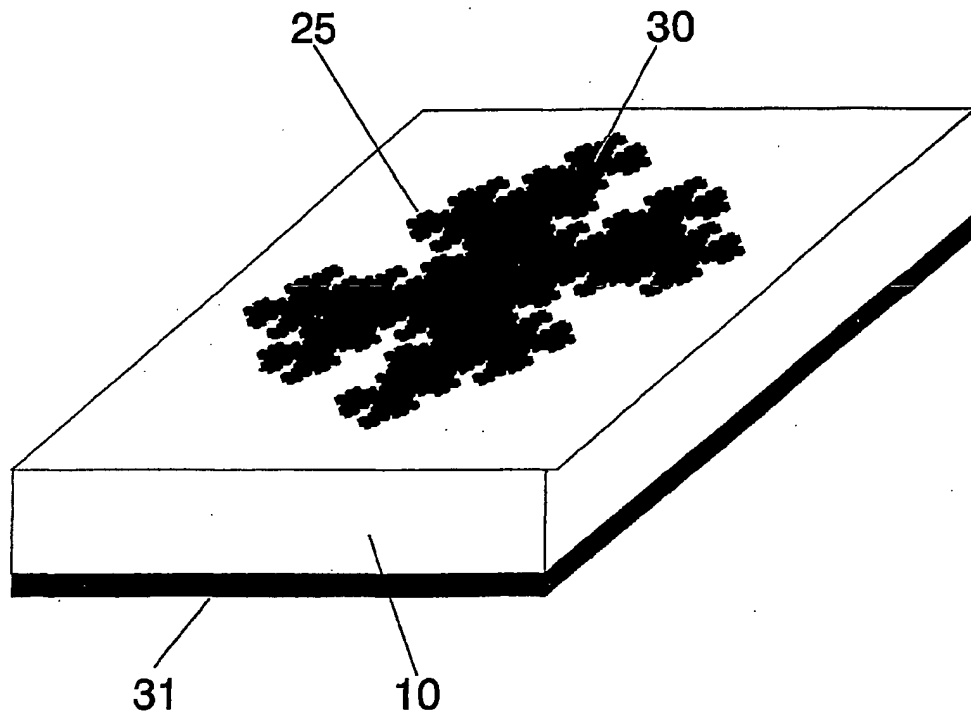


**FIG. 11**

12/25

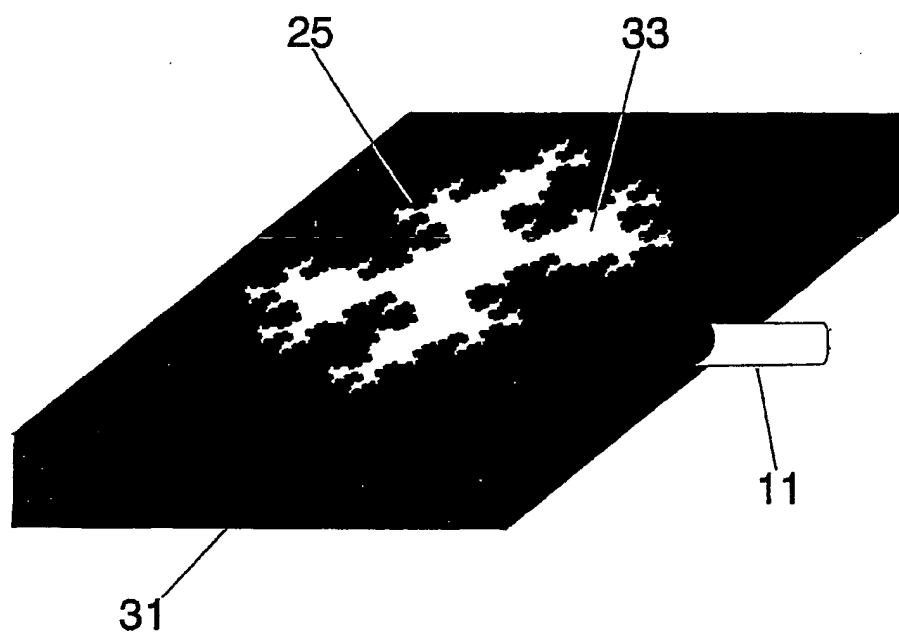


**FIG. 12**

13/25

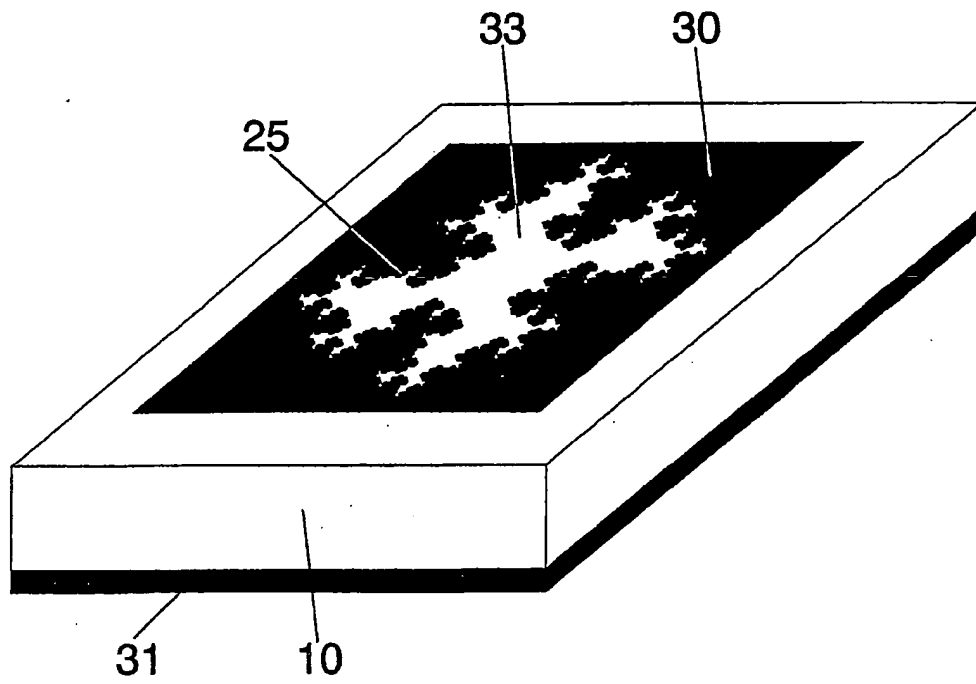

**FIG. 13**


14/25

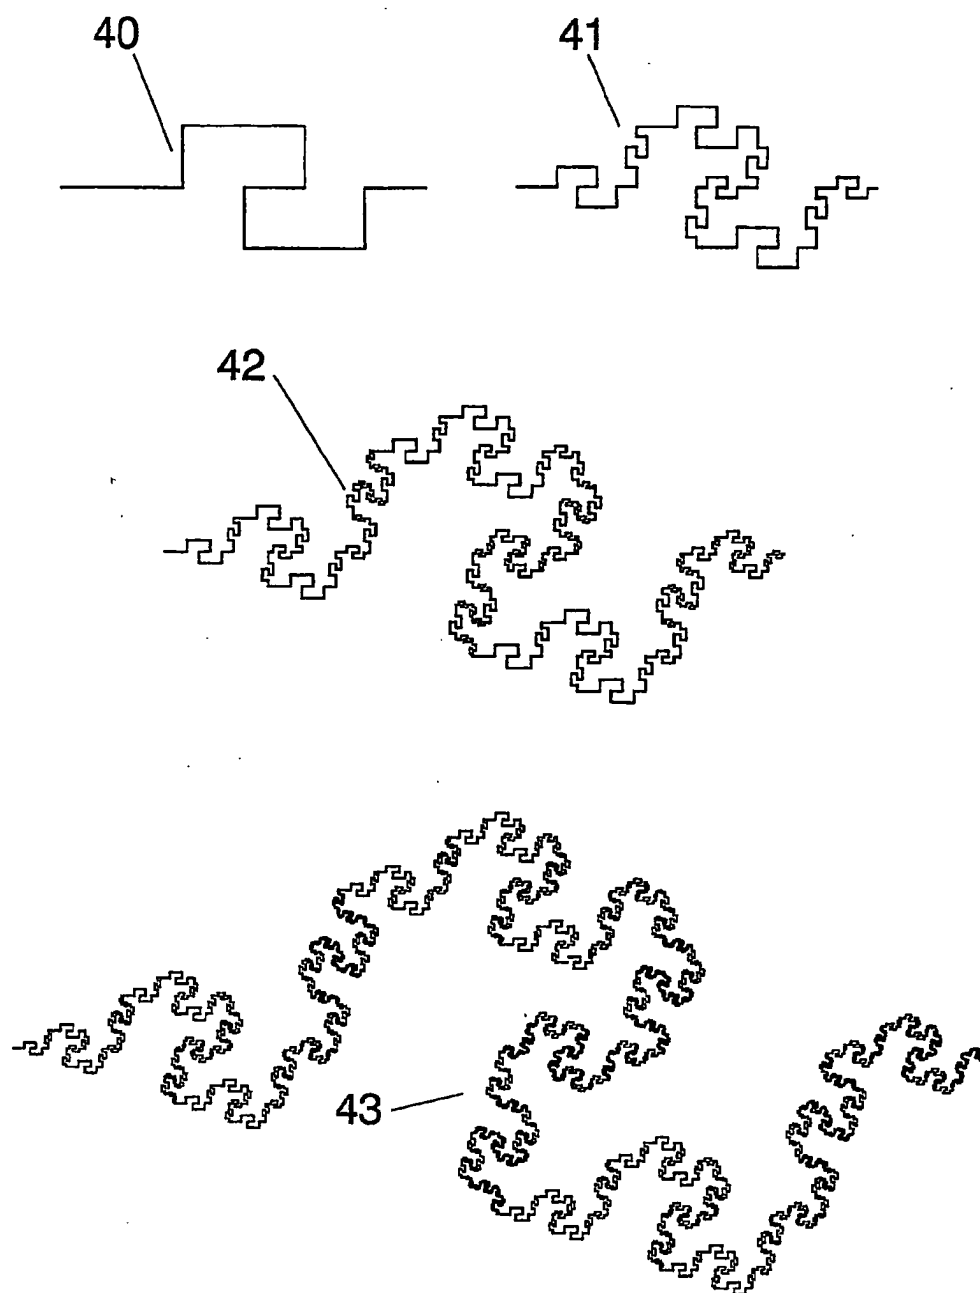

**FIG. 14**

SUBSTITUTE SHEET (RULE 26)


15/25

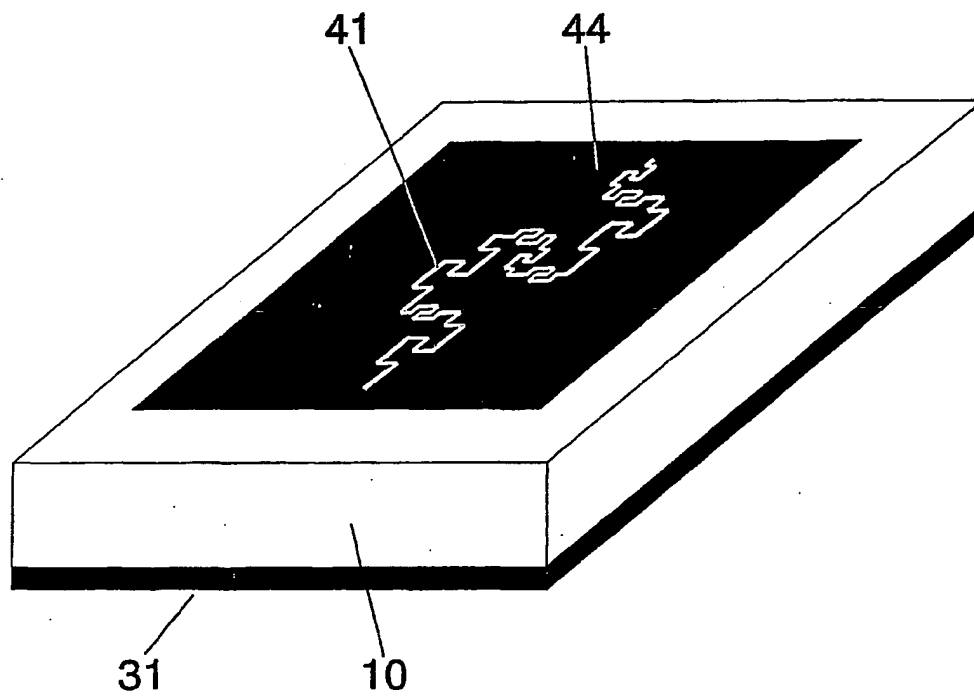

**FIG. 15**




16/25

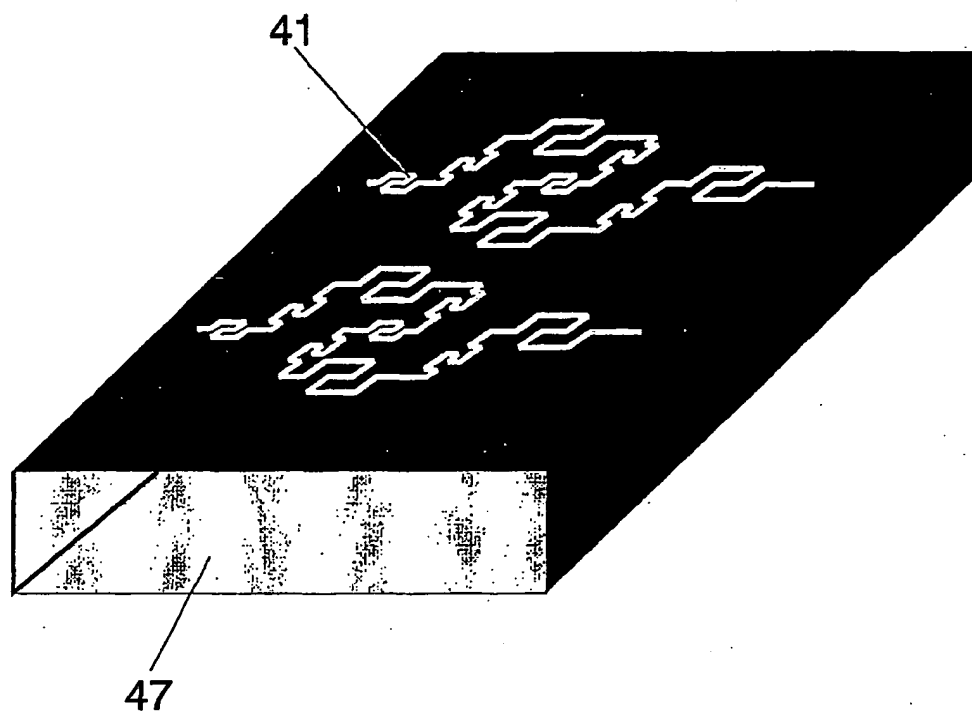


**FIG. 16**

17/25

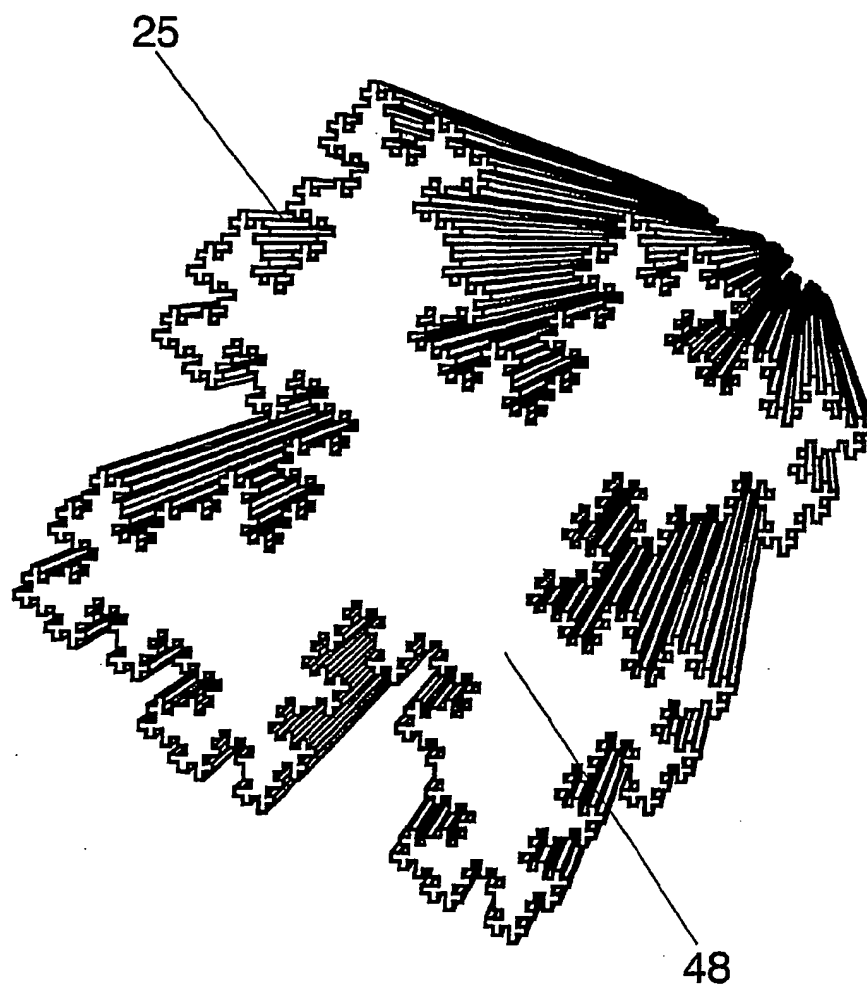


**FIG. 17**

18/25

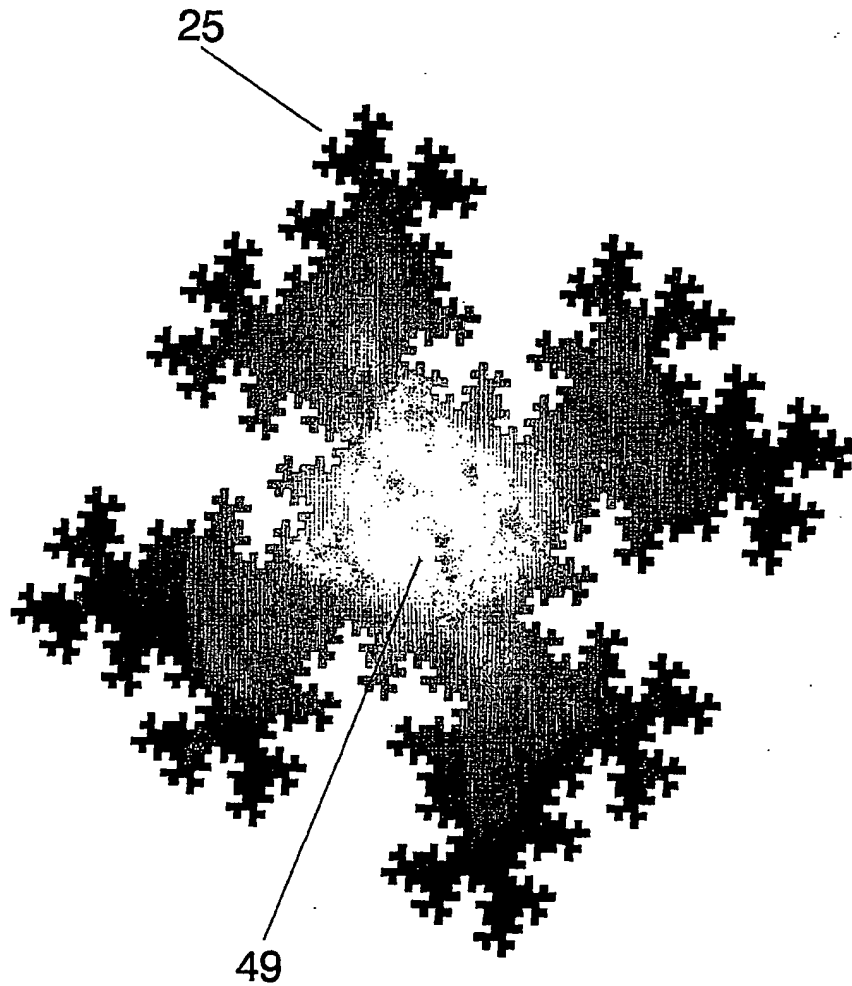

**FIG. 18**


19/25

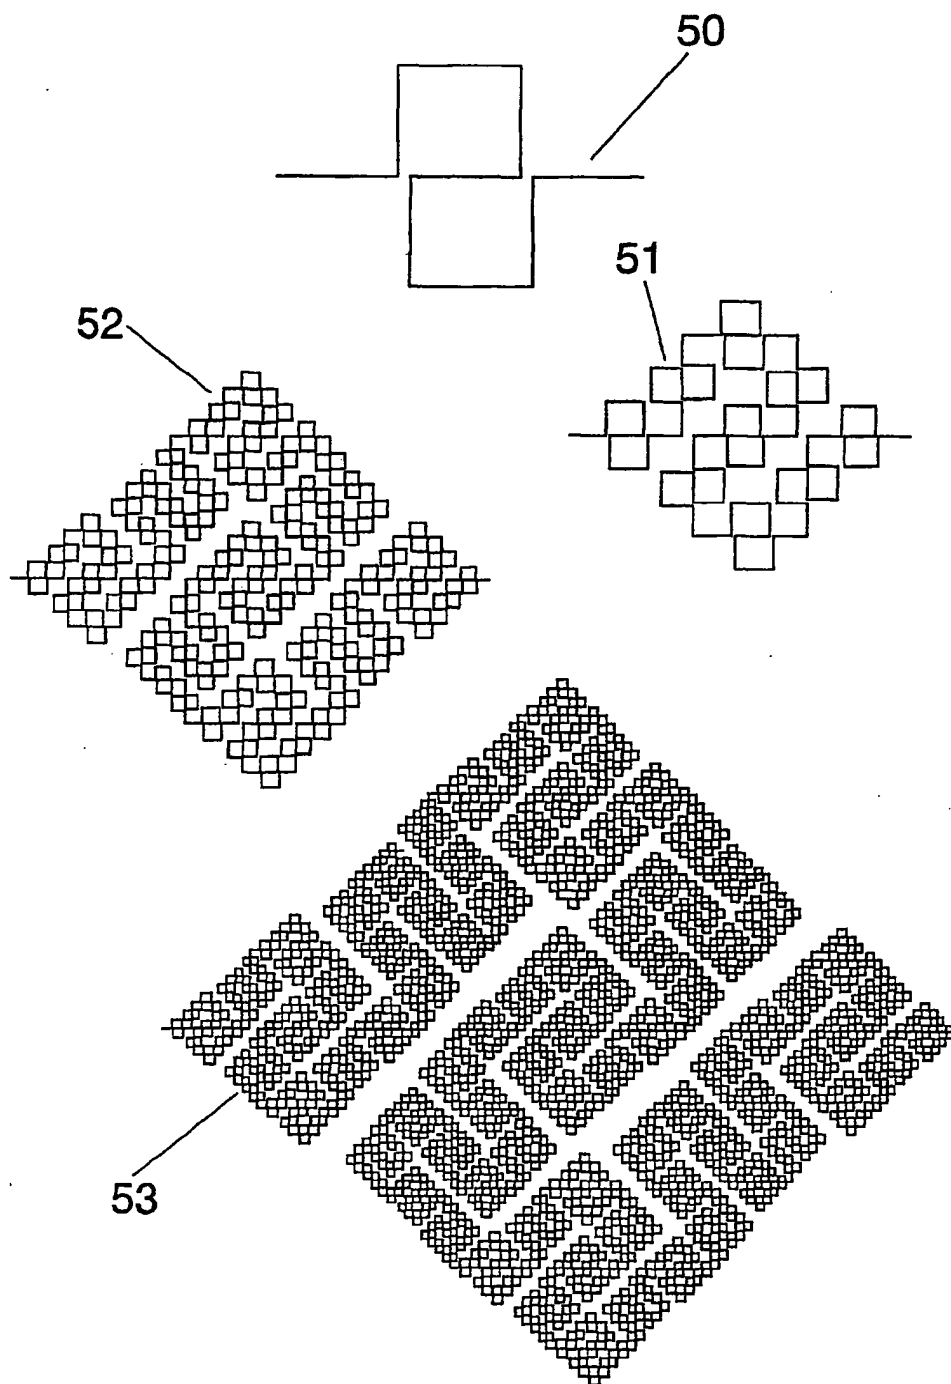

**FIG. 19**



SUBSTITUTE SHEET (RULE 26)

20/25

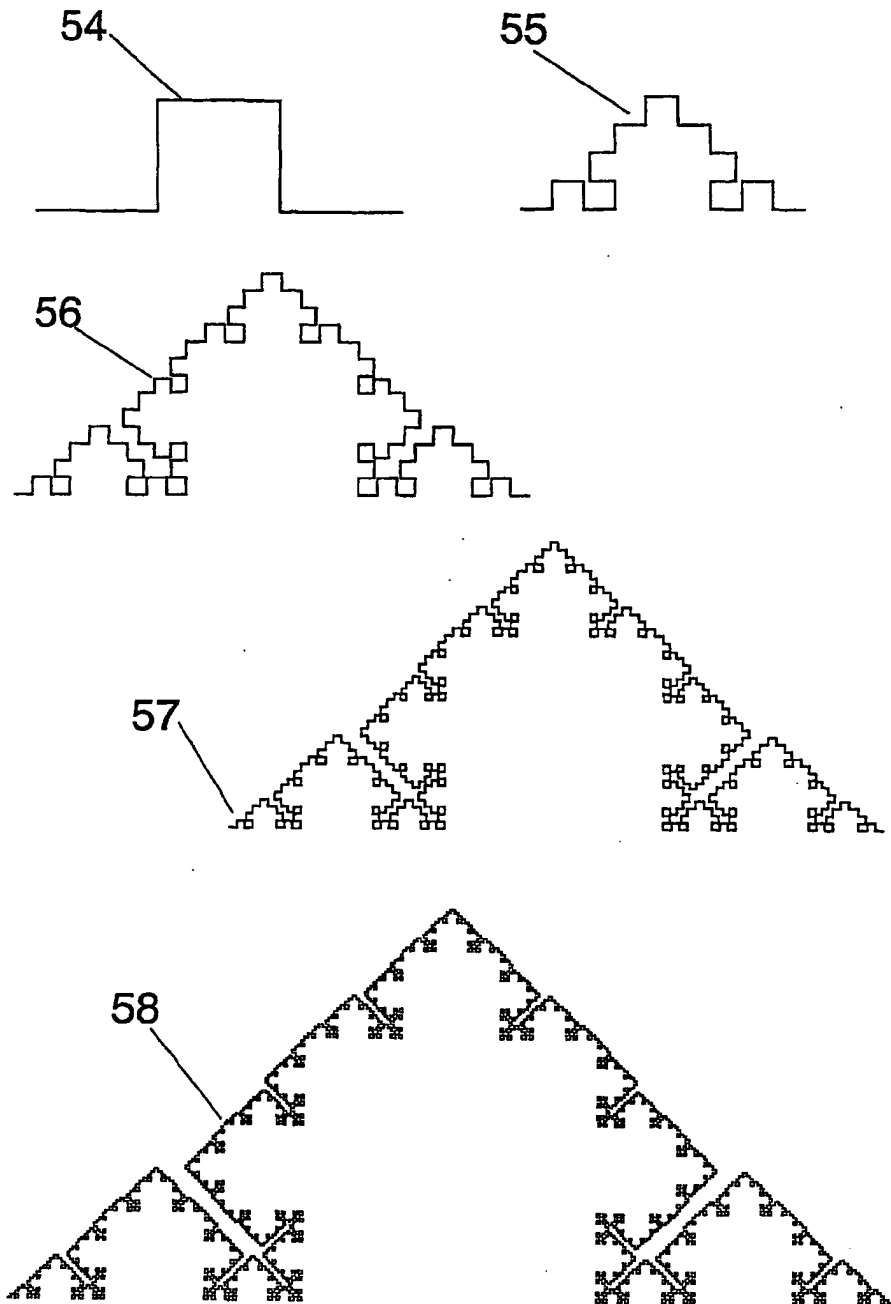


**FIG. 20**  
SUBSTITUTE SHEET (RULE 26)

21/25

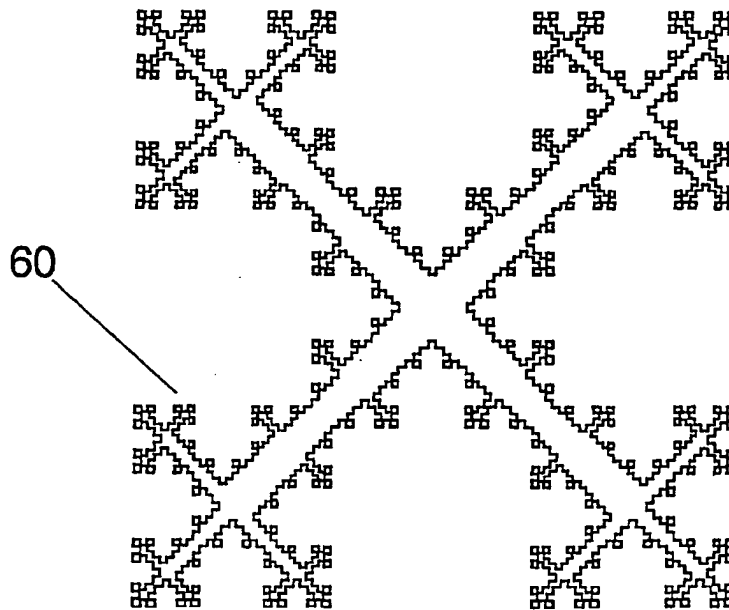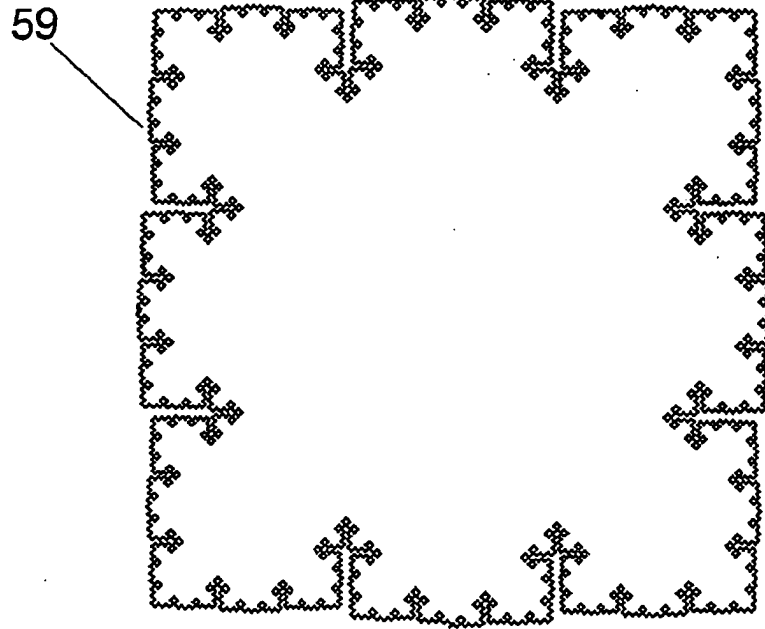


**FIG. 21**  
SUBSTITUTE SHEET (RULE 26)

22/25

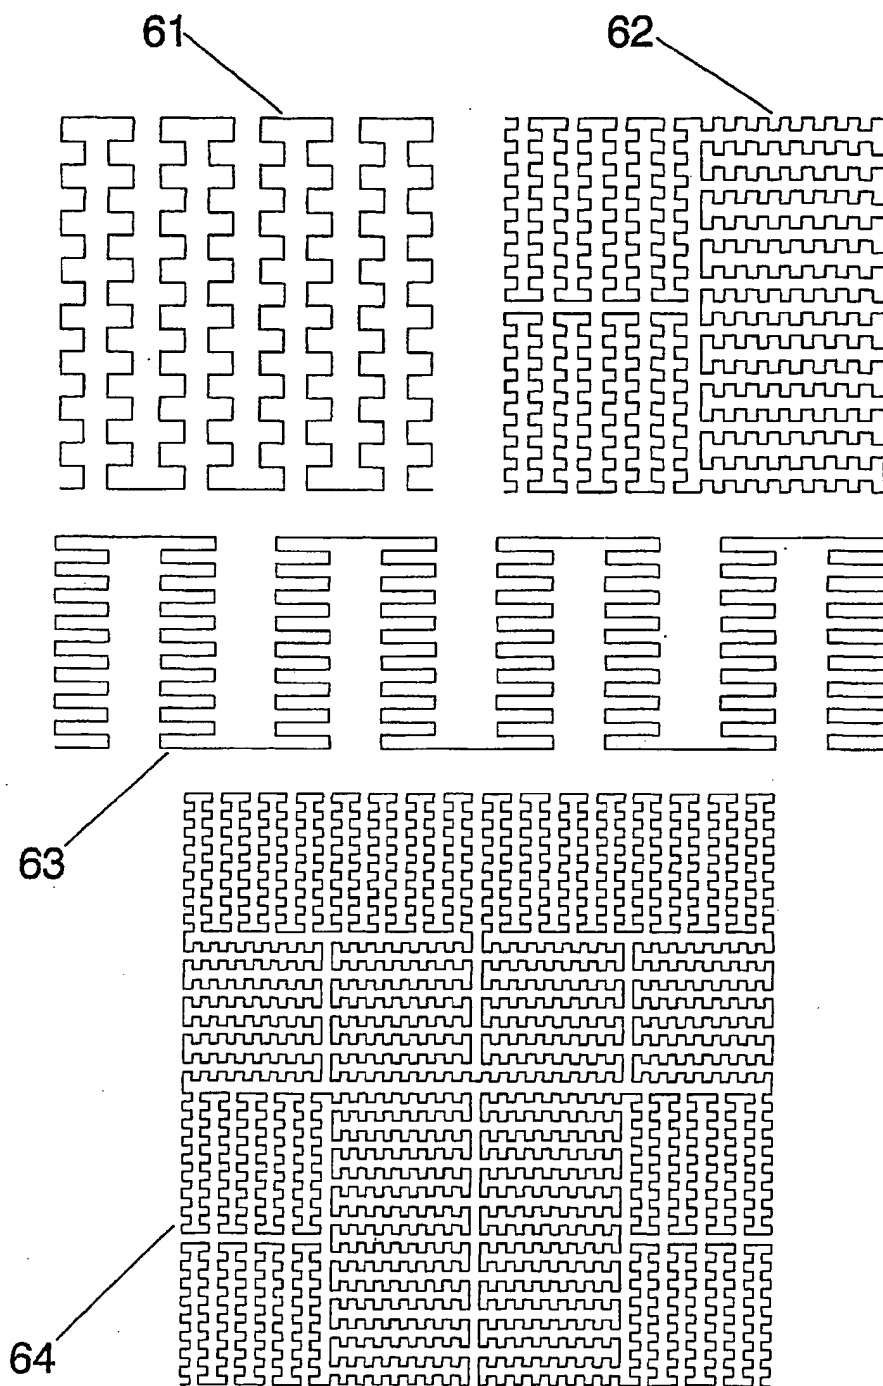**FIG. 22**

SUBSTITUTE SHEET (RULE 26)


23/25

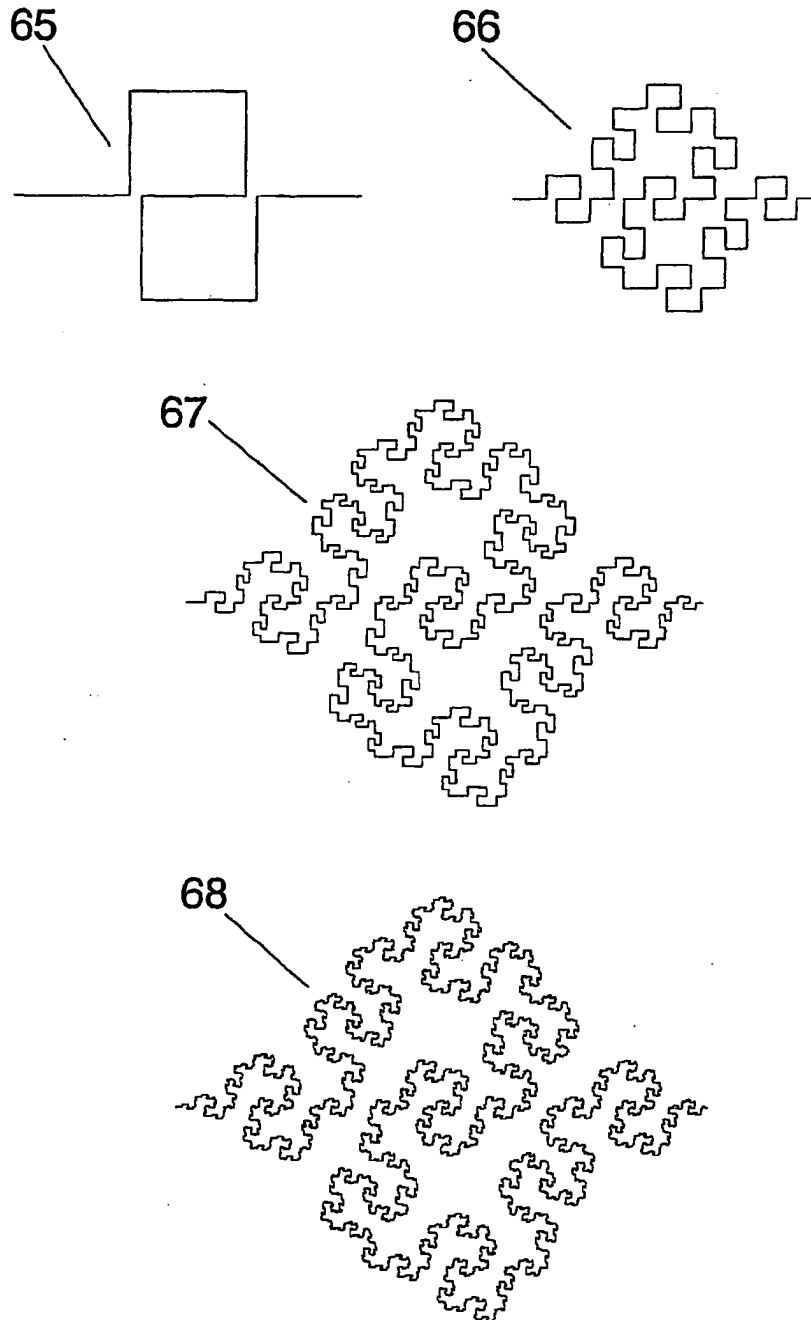

**FIG. 23**  
SUBSTITUTE SHEET (RULE 26)




24/25

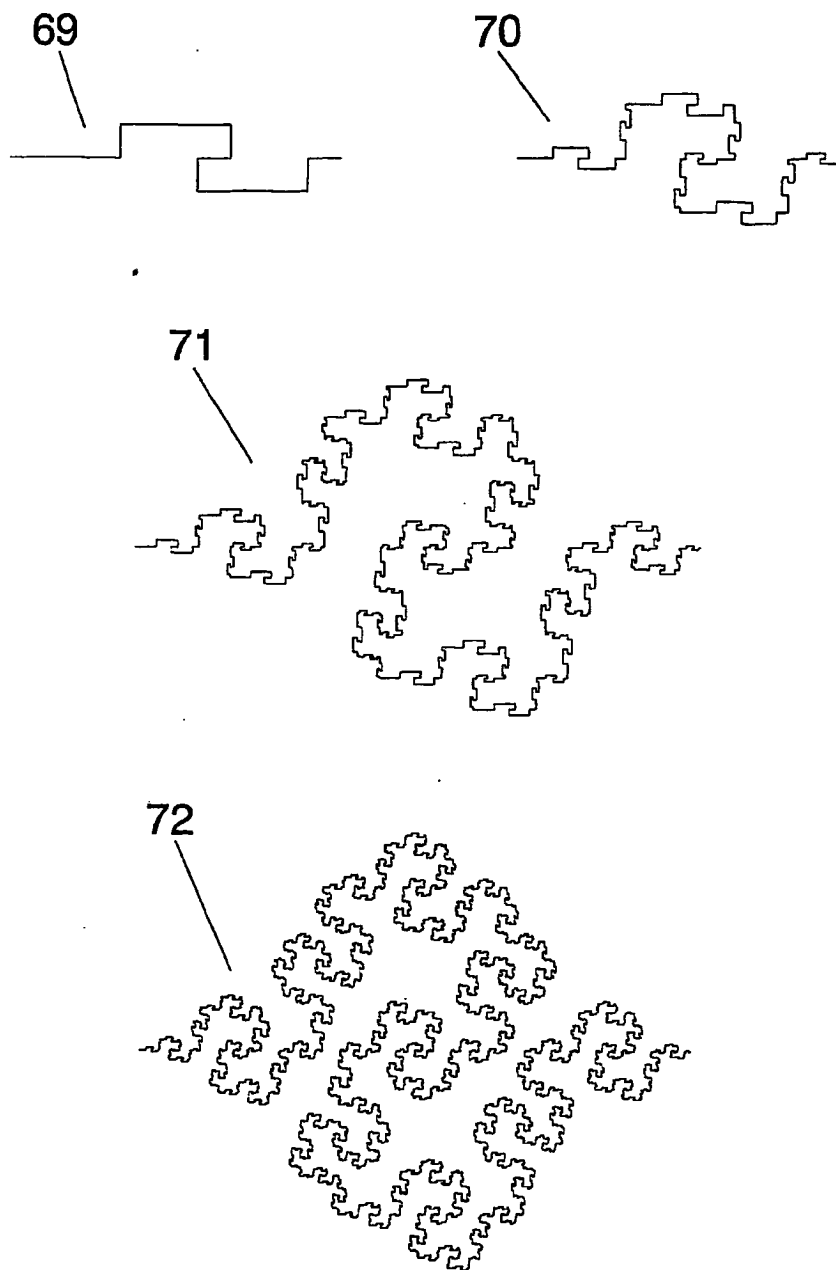

**FIG. 24**  
SUBSTITUTE SHEET (RULE 26)

25/25

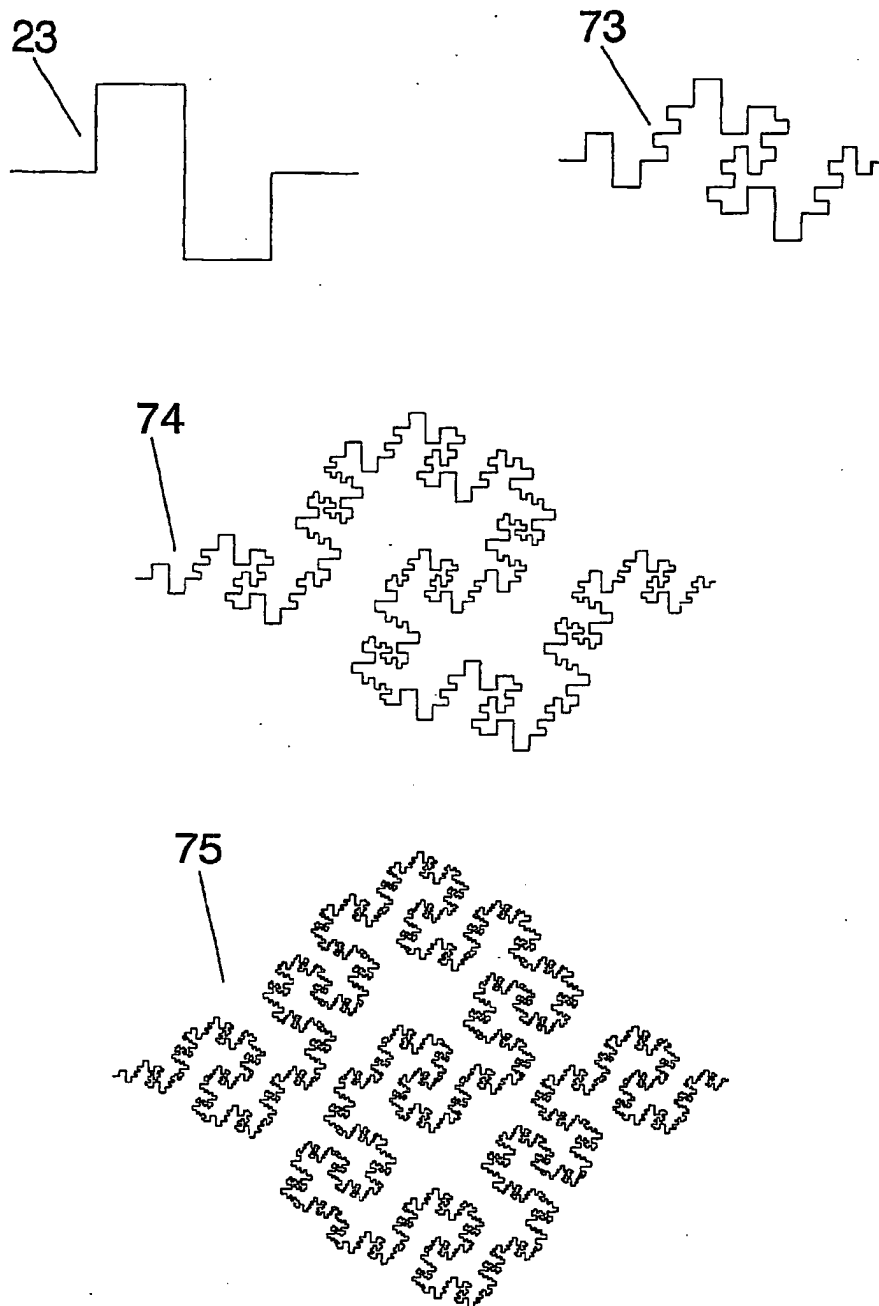

**FIG. 25**

SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

 Im Application No  
 PCT/EP 00/00411

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H01Q1/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 06578 A (FRACTAL ANTENNA SYSTEMS INC ;COHEN NATHAN (US)) 20 February 1997 (1997-02-20) abstract	1-16
X	WO 99 27608 A (COHEN NATHAN) 3 June 1999 (1999-06-03) claims 1-11; figure 2A	1-16
X	US 4 843 468 A (DREWERY JOHN O) 27 June 1989 (1989-06-27) abstract	1-16
X	EP 0 969 375 A (SUN MICROSYSTEMS INC) 5 January 2000 (2000-01-05) abstract	1-16
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

7 November 2000

Date of mailing of the international search report

14/11/2000

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Wattiaux, V

## INTERNATIONAL SEARCH REPORT

Application No.  
PCT/EP 00/00411

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ES 2 112 163 A (UNI POLITECNICA DE CATALUNYA) 16 March 1998 (1998-03-16) abstract	1-16

## INTERNATIONAL SEARCH REPORT

PCT/EP 00/00411

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9706578 A	20-02-1997	EP 0843905 A US 6104349 A	27-05-1998 15-08-2000
WO 9927608 A	03-06-1999	NONE	
US 4843468 A	27-06-1989	DE 3783525 A DE 3783525 T EP 0253608 A GB 2193411 A,B JP 63051774 A	25-02-1993 05-08-1993 20-01-1988 03-02-1988 04-03-1988
EP 0969375 A	05-01-2000	JP 2000112791 A	21-04-2000
ES 2112163 A	16-03-1998	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**